
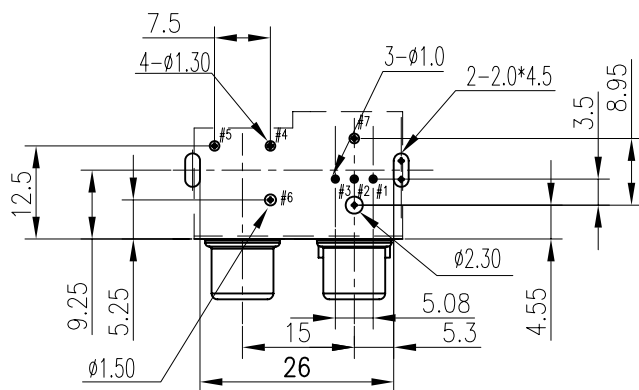
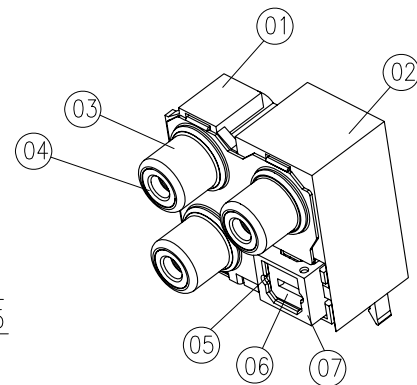
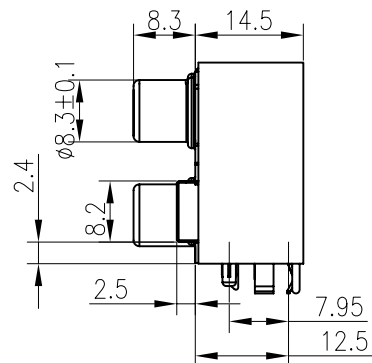



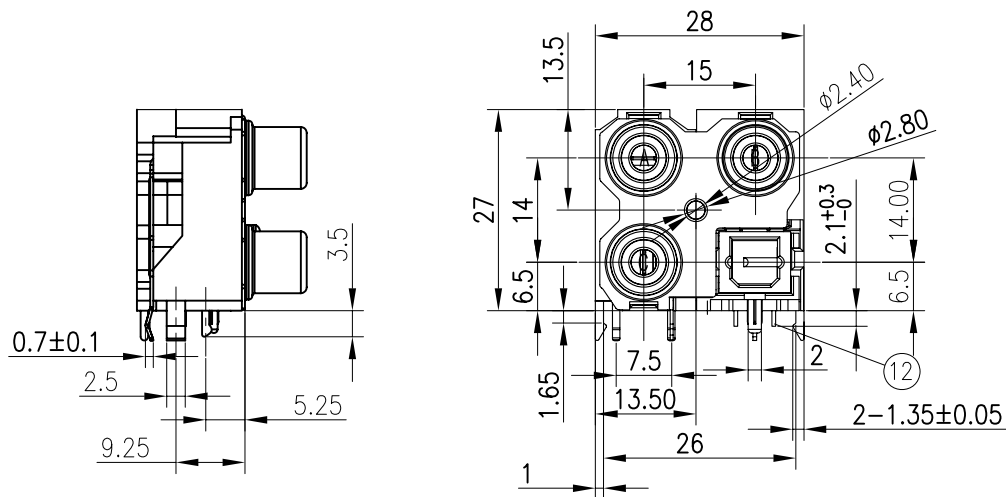


Recommend PCB Layout

Tolerance : ± 0.05

(JACK TOP VIEW)

Recommend PCB Thickness:1.6mm

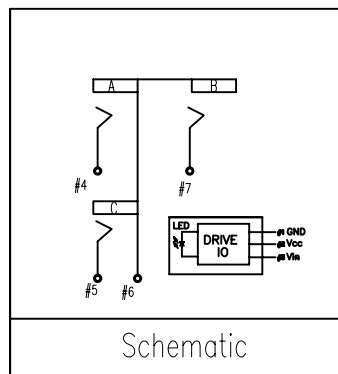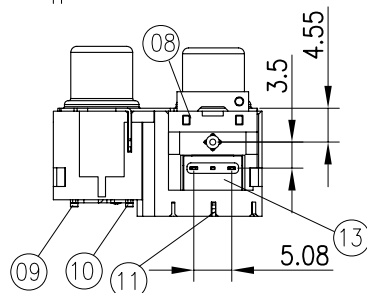

13	COVER	1	PA9T	UL 94V-0 BLACK
12	ODL	1	25Mbps	
11	TERMINAL #7	1	BRASS	MATTE TIN PLATING
10	TERMINAL#4	1	BRASS	CuSn PLATING
09	TERMINAL#5	1	BRASS	CuSn PLATING
08	FRAME_2	1	LCP	UL 94V-0 BLACK
07	FRAME_1	1	PA66	UL 94V-0 BLACK
06	GATE	1	PA66	UL 94V-0 BLACK
05	SPRING	1	STAINLESS STEEL	
04	WASHER	3	PBT	UL 94V-0 SEE TABLE 1
03	OUTER CONTACT(3 HOLES)	1	BRASS	CuSn PLATING
02	HOUSING-R	1	PBT	UL 94V-0 BLACK
01	HOUSING_L	1	PBT	UL 94V-0 BLACK

A	B	C
WHITE	YELLOW	RED

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$ 0.38
.XX $\pm$ 0.25
.XXX $\pm$ 0.10
ANG $\pm$

照片框

ORDER INFORMATION

RCAPOFB2-FRL2SE1WYR-03T-LF

SERIES
FEMALE TO FEMALE
DIP 90°
LOCK SHUNT
TX
03 WAY
ABC:WHITE/YELLOW/RED
LEADFREE

DESCRIPTION: