

Protection class IP67

Mating cycle >500 mating cycles

Maximum operating temperature 100 °C

Minimum operating temperature -40 °C

Rated voltage 400 V (3+PE)

Rated current 6000 V (3+PE)



Rated current (40°C) 16 A (3+PE)

Contact resistance ≤ 5 mΩ

Contact material CuZn (gold-plated brass)

Plug body material PBT (UL 94 V-0)

Housing material PBT (UL 94 V-0)

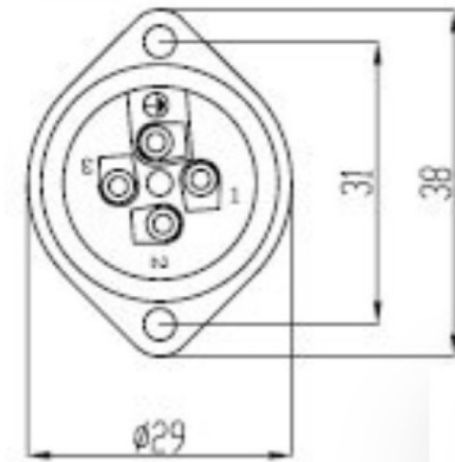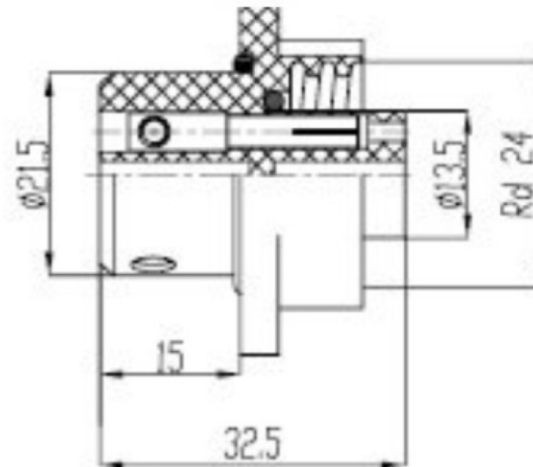

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

RD24-SSPE-04-LF

SERIES | | | LEADFREE
| | | 04 WAY
| | | PANEL EAR
| | | SOLDER
| | | FEMALE

DESCRIPTION: Rd24 防水母插座