



Notes:

1. Insulator: Thermalplastic PA66+30%GF, UL94V-0, Nature


2. Terminal: Brass

Finish: Tin plated 120u" min. overall


3.* For 3P is 5.70mm, 2P is 3.00mm.



L POST



R POST




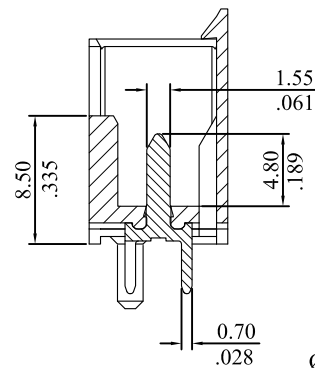


SECTION A-A

$$A=C+6.7$$

$$B=C+5.2$$

$$C=2.50*(\text{No. of circuit}-1)$$

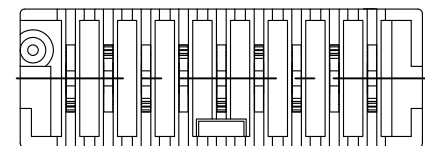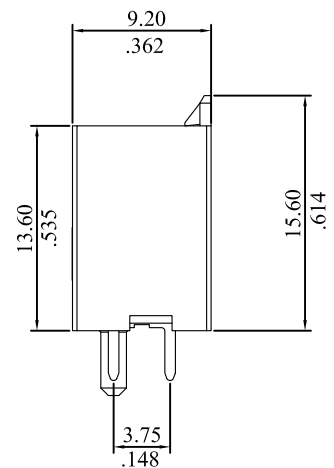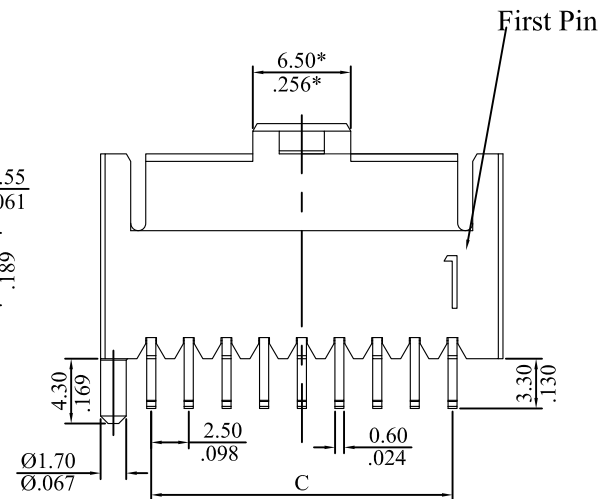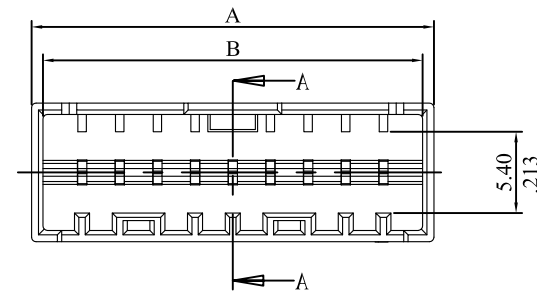

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 1°

照片框

ORDER INFORMATION

RET25-PDPx-xx0yy-LF

SERIES MALE DIP 180° R:R POST L:L POST POST LEADFREE KEY LOCK TYPE 02:02WAY 10:10WAY

DESCRIPTION: Rast 2.5 Wafer

TYPE	0A
KEY/LOCK	
2-way	

TYPE	0A	LA	LB
KEY/LOCK			
3-way			

TYPE	0A	LA	LB	LC
KEY/LOCK				
4-way				

TYPE	0A	LA	LB	LC	LD
KEY/LOCK					
5-way					

TYPE	0A	LA	LB	LC
KEY/LOCK				
6-way				

LD	LE

TYPE	0A	LA	LB	LC
KEY/LOCK				
7-way				

LD	LE	LF

TYPE	0A	LA	LB	LC
KEY/LOCK				
8-way				

LD	LE	LF	LG

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$ 0.10
ANG $\pm$ 1°

照片框

ORDER INFORMATION

RET25-PDPx-xx0yy-LF

SERIES
MALE
DIP 180°
R:R POST
L:L POST
POST
LEADFREE
KEY LOCK TYPE
02:02WAY
10:10WAY

DESCRIPTION:

TYPE	0A	LA	LB
KEY/LOCK 9-way			
	LC	LD	LE
	LF	LG	LH

TYPE	0A	LA	LB
KEY/LOCK 10-way			
	LC	LD	LE
	LF	LG	LH
	LI		

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20

DATE

.XXX ± 0.10

ANG ± 1°


SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

RET25-PDPx-xx0yy-LF

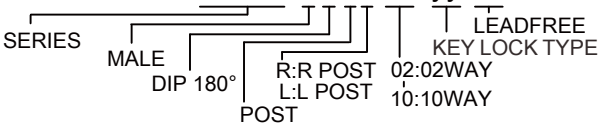

DESCRIPTION:

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com