

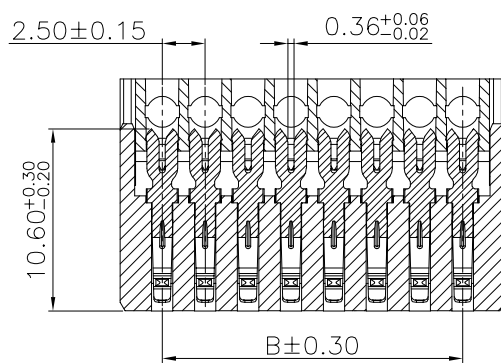
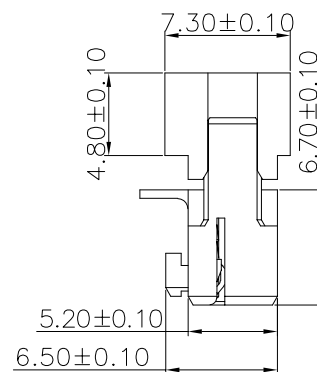
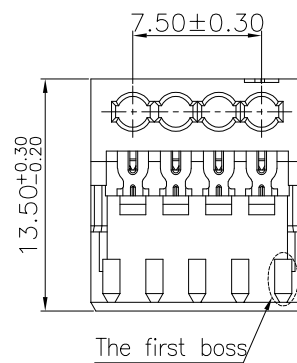



Shipping Arrangement: 50 sets per strip  
Shipped in carton box

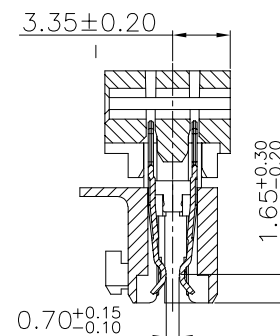

SECTION E-E



SECTION F-F

### Specifications

Current Rating: 2.0Amp.

Insulation Resistance: 1000MΩMin.

Dielectric Withstanding Voltage: 1200VAC.

Contact Resistance: 10mΩMax.

Operating Temperature: -40°C to +125°C.


### Materials

Contact Material: Phosphor Bronze.

Insulator Material: Thermoplastic,  
UL 94V-0 PBT NYLON 66 or the  
equivalent material.

◆ Critical Characteristics.  
indicates product characteristics,  
functionalities, and manufacturing processes  
regarding to customer's specifications.

◆ : Safety Features  
indicates product characteristics,  
functionalities, and manufacturing processes  
complying to legal regulations stated by  
local government.

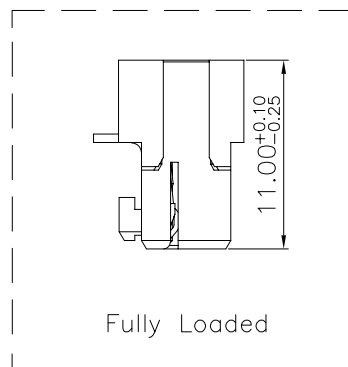

Fully Loaded

### Note:

1. The first boss is consistent with the direction  
of the first pin. ⚠

### RoHS Compliant

### TOLERANCES ARE

照片框

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30

.X ± 0.25

.XX ± 0.15

.XXX ± 0.10

ANG ±

PPOJECTION

### ORDER INFORMATION

RET25-ST1322-0405C-LF

SERIES

LEADFREE

5C KEY LOCK TYPE

04 WAY

22 AWG

HIGH 13.5mm

FEMALE

IDT

DESCRIPTION:

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com