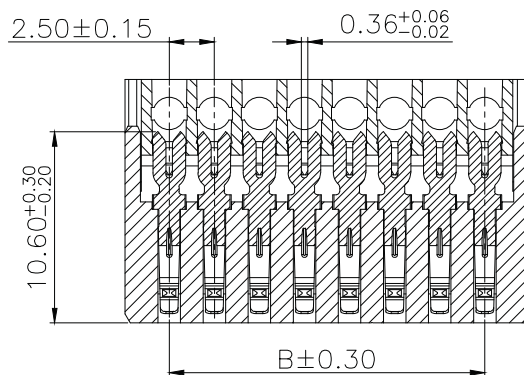
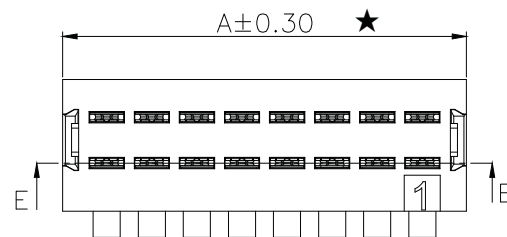
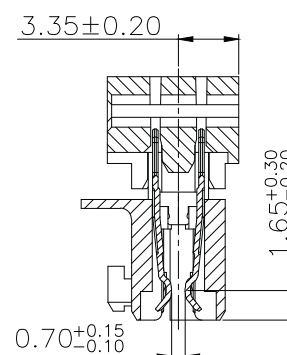
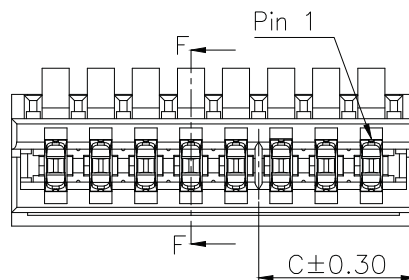
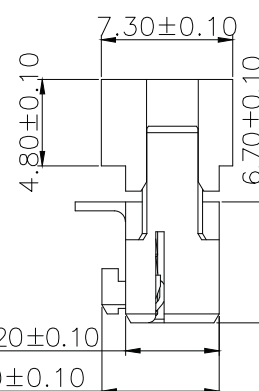
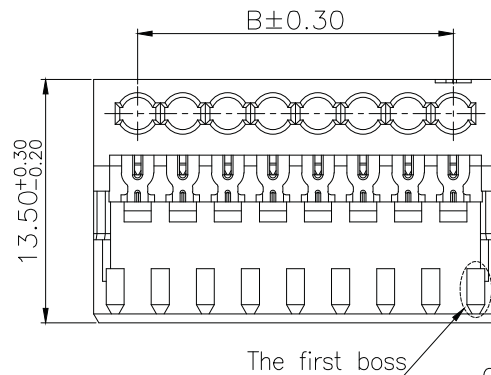


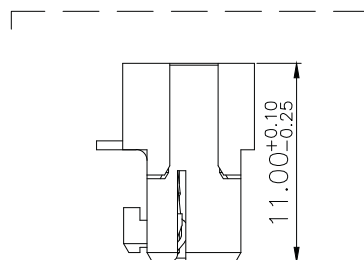
Shipping Arrangement: 50 sets per strip
Shipped in carton box



SECTION E-E



SECTION F-F



Fully Loaded

Note:
1.The first boss is consistent with the direction
of the first pin.

Specifications
Current Rating:2.0Amp.
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:1200VAC.
Contact Resistance:10mΩMax.
Operating Temperature:-40°C to +125°C.
Materials
Contact Material:Phosphor Bronze.
Insulator Material:Thermoplastic,
UL 94V-0 PBT,NYLON 66 or the
equivalent material.

"★": Critical Characteristics.
indicates product characteristics,
functionalities, and manufacturing processes
regarding to customer's specifications.
"☆": Safety Features
indicates product characteristics,
functionalities, and manufacturing processes
complying to legal regulations stated by
local government.

Pin NO.	A	B
02	7.40	2.50
03	9.90	5.00
04	12.40	7.50
05	14.90	10.00
06	17.40	12.50
07	19.90	15.00
08	22.40	17.50
09	24.90	20.00
10	27.40	22.50
11	29.90	25.00
12	32.40	27.50
13	34.90	30.00
14	37.40	32.50
15	39.90	35.00
16	42.40	37.50
17	44.90	40.00

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30
.X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

RET25-ST1322-xx0xx-LF

SERIES

FEMALE

IDT

HIGH 13.5mm

LEADFREE

KEYLOCKTYPE

02:02WAY

17:17WAY

22 AWG

DESCRIPTION:

TYPE	0A	LA	30	40	3A	4A	50	5A	60 (Green)
KEY/LOCK 2-way									

TYPE	0A	LA	LB	30	40	3A	3B	4A	4B	5A	5B
KEY/LOCK 3-way											

TYPE	0A	LA	LB	LC	50	5A	5B	5C	30	3B
KEY/LOCK 4-way										

TYPE	0A	LA	LB	LC	LD	5A	5B	5C	5D	30	40
KEY/LOCK 5-way											

TYPE	0A	LA	LB	LC	LD	LE	5A
KEY/LOCK 6-way							

5B	5C	5D	5E

TYPE	0A	LA	LB	LC	LD	LE	LF
KEY/LOCK 7-way							

TYPE	0A	LA	LB	LC	LD	LE
KEY/LOCK 8-way						

LF	LG	5A	5B

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ± 0.30

.X, ± 0.25

.XX, ± 0.15

.XXX, ± 0.10

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

RET25-ST1322-xx0xx-LF

SERIES

FEMALE

IDT

HIGH 13.5mm


LEADFREE






KEYLOCKTYPE





02:02WAY
17:17WAY



22 AWG

DESCRIPTION: RASTLink 2.5mm Single Row Female Connector

TYPE	0A	LA	LB	LC
KEY/LOCK 9-way				


LD	LE	LF	LG	LH
				

TYPE	0A	LA	LB	LC	LD
KEY/LOCK 10-way					

LE	LF	LG	LH	LI
				

TYPE	30
KEY/LOCK 11way	

TYPE	5K
KEY/LOCK 13way	

TYPE	5L
KEY/LOCK 15way	

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ± 0.30

.X, ± 0.25

.XX, ± 0.15

.XXX, ± 0.10

ANG ±

PPOJECTION 

照片框

ORDER INFORMATION

RET25-ST1322-xx0xx-LF

SERIES

FEMALE

IDT

HIGH 13.5mm

LEADFREE
KEYLOCKTYPE

02:02WAY

17:17WAY

22 AWG

DESCRIPTION: RASTLink 2.5mm Single Row Female Connector