
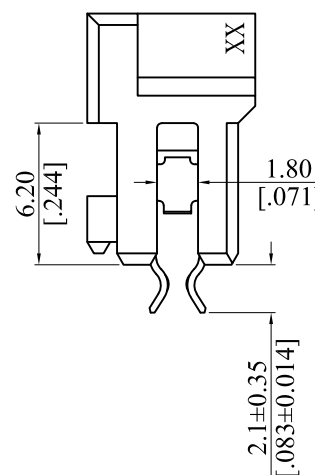

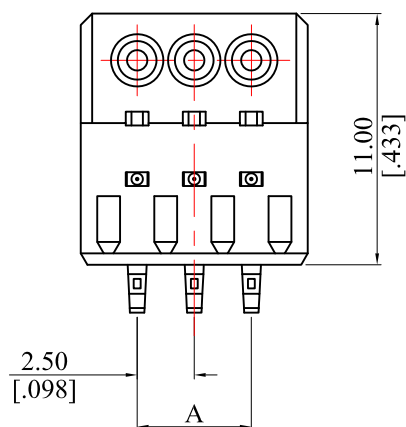



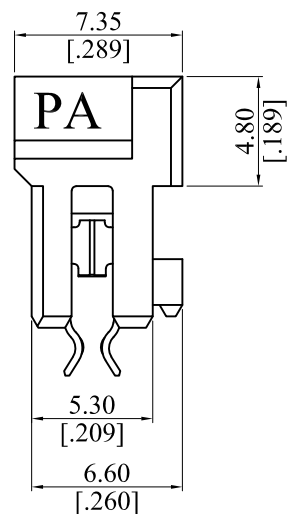

Note:

Material:

Insulator: PA66+25%G.F., UL94 V-0, Natural



Terminal: Phosphor Bronze;

Finish: Tin plated 120u" min. overall

Specification:

Voltage Rating: 32V AC;

Temperature Rating: -40℃~+110℃;

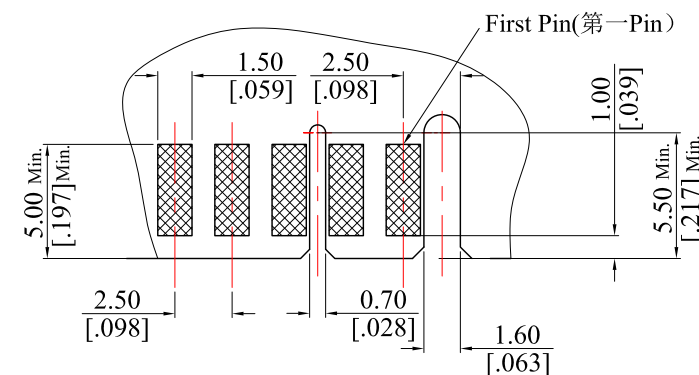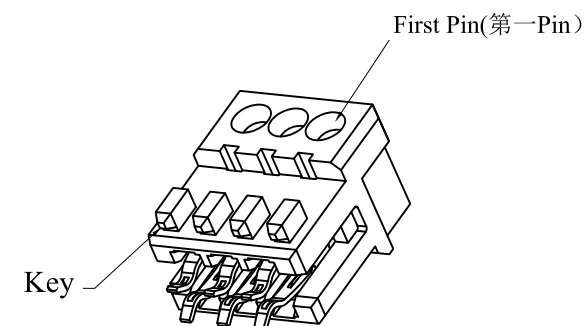

PCB Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

RET25-STX11xx-yy0zz-LF

SERIES FEMALE IDT WO/LOCK HIGH 11.0mm
02:02WAY 15:15WAY 22:22 AWG 24:24 AWG
LEADFREE KEYLOCKTYPE

DESCRIPTION: Rast 2.5 Connector

TYPE	00	0A	0B	LA
KEY/LOCK 2-way				

TYPE	00	0A	0B	0C	0D	0E	0F	03	06	08	36	37	LA	LB
KEY/LOCK 3-way														

TYPE	0A	0B	0C	0D	0E	LA	LB	LC
KEY/LOCK 4-way								

TYPE	0A	0B	0C	33	41	LA	LB	LC	LD
KEY/LOCK 5-way									

TYPE	0A	0B	LA	LB	LC	LD	LE
KEY/LOCK 6-way							

TYPE	0A	0G	60	71	72	LA	LB
KEY/LOCK 7-way							

LC	LD	LE	LF

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

RET25-STX11xx-yy0zz-LF

SERIES

FEMALE

IDT

WO/LOCK

HIGH 11.0mm

LEADFREE

KEYLOCKTYPE

02:02WAY

15:15WAY

22:22 AWG

24:24 AWG

DESCRIPTION: Rast 2.5 Connector

TYPE	0A	0B	LA	LB	LC	LD
KEY/LOCK 8-way						
	LE	LF	LG			

TYPE	0A	0B	0C	44	LA	LB
KEY/LOCK 9-way						
	LC	LD	LE	LF	LG	LH

TYPE	0A	0B	0C	LC
KEY/LOCK 10-way				

TYPE	0A	41
KEY/LOCK 11-way		

TYPE	0A
KEY/LOCK 12-way	

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

RET25-STX11xx-yy0zz-LF

SERIES

FEMALE

IDT

WO/LOCK

HIGH 11.0mm

LEADFREE

KEYLOCKTYPE

02:02WAY

15:15WAY

22:22 AWG


24:24 AWG

DESCRIPTION: Rast 2.5 Connector


TYPE	0A
KEY/LOCK 13-way	

TYPE	0A
KEY/LOCK 14-way	


TYPE	0A	09
KEY/LOCK 15-way		

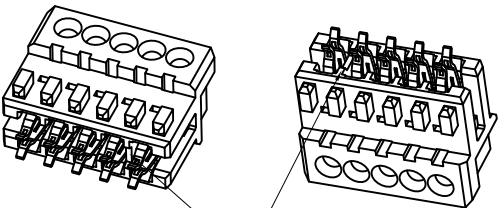

Wall

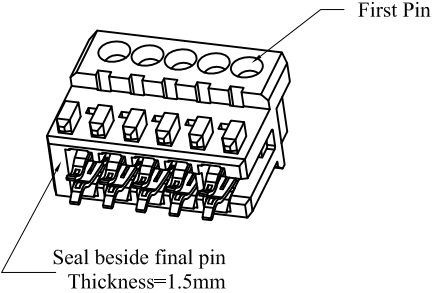

For example:



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

RET25-STX11xx-yy0zz-LF

SERIES FEMALE IDT WO/LOCK HIGH 11.0mm 02:02WAY 15:15WAY 22:22 AWG 24:24 AWG LEADFREE KEYLOCKTYPE

DESCRIPTION: Rast 2.5 Connector