
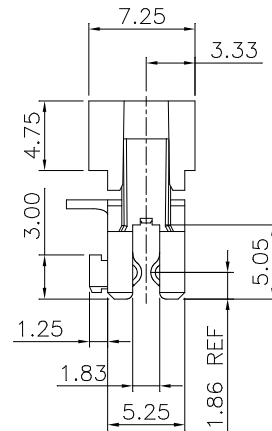


SHIPPING ARRANGEMENT
SCALE 2:1



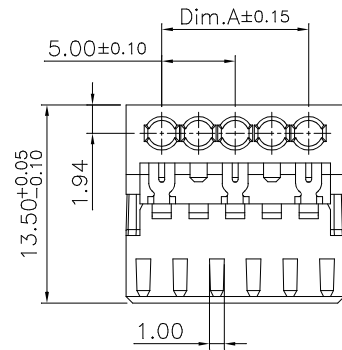


Dimension Information:

B Type		
Pin.No	Dim.A	Dim.B
2	5.0	9.875
3	10.0	14.875
4	15.0	19.875
5	20.0	24.875
6	25.0	29.875
7	30.0	34.875
8	35.0	39.875
9	40.0	44.875
10	45.0	49.875

Specifications:
Current Rating:2.0A AC,DC
Voltage Rating:250V AC,DC
Contact Resistance:10m ohm.Max
Insulation Resistance:1000M ohm.Min
Withstanding Voltage:1000V AC/Minute
Operating Temperature Range:-20°C~+85°C
Insulation O.D.=1.40~1.50mm

Material:
Insulator:Thermoplastic (UL94V-0)
Insulator Color:Natural
Contact:Copper Alloy
Plated:Tin

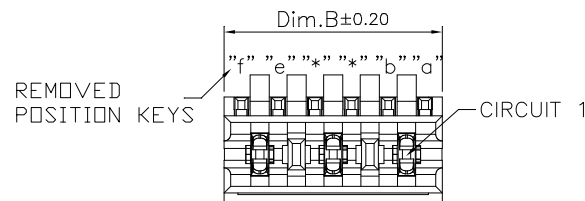

B Type

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.20
.XX ± 0.15
.XXX ±
ANG ±

照片框

ORDER INFORMATION

RET50-ST13-xx0yy-LF

SERIES

FEMALE

IDT

LEADFREE






KEYLOCK TYPE

0-H TYPE

02~10 WAY

HIGH 13.5mm


DESCRIPTION: 5.0mm Pitch Female IDC

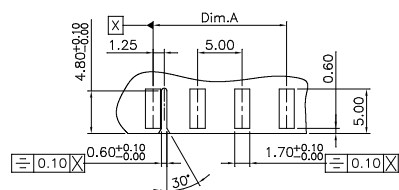

照片框



DESCRIPTION: 5.0mm Pitch Female IDC

1




END WALL OPTION E

FIRST END WALL	LAST END WALL
CLOSED	CLOSED





2




END WALL OPTION F

FIRST END WALL	LAST END WALL
NARROW	OPEN





3




END WALL OPTION G

FIRST END WALL	LAST END WALL
NARROW FLUSH	OPEN





4



END WALL OPTION H

FIRST END WALL	LAST END WALL
NARROW FLUSH	NARROW FLUSH



5

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.20
.XX ± 0.15
.XXX ±
ANG ±

照片框

ORDER INFORMATION

RET50-ST13-xx0yy-LF

SERIES

FEMALE

IDT

LEADFREE

KEYLOCK TYPE

0-H TYPE

02~10 WAY

HIGH 13.5mm

DESCRIPTION: 5.0mm Pitch Female IDC

2 CIRCUIT						
PART NUMBER	REMOVED POSITION KEYS	CONFIGURATION	FIRST ENDWALL	LAST ENDWALL	POLARIZING RIB BETWEEN	COLOUR STRIPE
RET50-ST13-02B01	NONE		OPEN	OPEN	NONE	RED
RET50-ST13-02B02	NONE		OPEN	OPEN	NONE	NONE
RET50-ST13-02B03	a		OPEN	OPEN	NONE	NONE
RET50-ST13-02B04	b		OPEN	OPEN	NONE	BLUE
RET50-ST13-02B05	c		OPEN	OPEN	NONE	NONE
RET50-ST13-02B06	c		OPEN	OPEN	NONE	BLACK
RET50-ST13-02B07	b d		OPEN	OPEN	NONE	BLUE
RET50-ST13-02B08	b c		OPEN	OPEN	NONE	BLUE
RET50-ST13-02B09	a b		OPEN	OPEN	NONE	NONE
RET50-ST13-02B10	b d		OPEN	OPEN	NONE	NONE
RET50-ST13-02B11	b		OPEN	OPEN	NONE	NONE
RET50-ST13-02B12	b c		OPEN	OPEN	NONE	NONE
RET50-ST13-02B13	a d		OPEN	OPEN	NONE	NONE
RET50-ST13-02B14	a c		OPEN	OPEN	NONE	NONE
RET50-ST13-02B15	a d		OPEN	OPEN	BETWEEN CCT 1&2	NONE
RET50-ST13-02B16	d		OPEN	OPEN	NONE	BLUE
RET50-ST13-02B17	c d		OPEN	OPEN	NONE	RED
RET50-ST13-02B18	a d		OPEN	OPEN	NONE	BLUE
RET50-ST13-02B19	a b		OPEN	OPEN	NONE	BLUE
RET50-ST13-02B20	c		OPEN	CLOSED	NONE	NONE
RET50-ST13-02B21	a b c		OPEN	OPEN	NONE	NONE
RET50-ST13-02B22	d		OPEN	OPEN	NONE	NONE
RET50-ST13-02B23	ALL		OPEN	OPEN	NONE	NONE
RET50-ST13-02B24	c d		OPEN	OPEN	NONE	NONE
RET50-ST13-02B25	ALL		OPEN	OPEN	NONE	BLACK
RET50-ST13-02B26	a b c		OPEN	OPEN	NONE	BLUE
RET50-ST13-02B27	a c		OPEN	CLOSED	NONE	NONE
RET50-ST13-02B28	a c d		OPEN	OPEN	NONE	VIOLET
RET50-ST13-02B29	c		OPEN	OPEN	NONE	BLUE
RET50-ST13-02B30	a		OPEN	OPEN	NONE	BLACK

2 CIRCUIT						
PART NUMBER	REMOVED POSITION KEYS	CONFIGURATION	FIRST ENDWALL	LAST ENDWALL	POLARIZING RIB BETWEEN	COLOUR STRIPE
RET50-ST13-02B31	d		OPEN	OPEN	NONE	YELLOW
RET50-ST13-02B32	b d		OPEN	OPEN	NONE	BROWN
RET50-ST13-02B33	b		OPEN	OPEN	NONE	GREEN
RET50-ST13-02B34	c d		OPEN	OPEN	NONE	BLUE
RET50-ST13-02B35	a b d		OPEN	OPEN	NONE	NONE
RET50-ST13-02B36	a c		OPEN	OPEN	NONE	GREEN
RET50-ST13-02B37	b d		OPEN	OPEN	NONE	RED
RET50-ST13-02B38	NONE		OPEN	OPEN	NONE	BLUE
RET50-ST13-02B39	b c d		OPEN	OPEN	NONE	NONE
RET50-ST13-02B40	NONE		CLOSED	OPEN	BETWEEN CCT 1&2	NONE
RET50-ST13-02B41	NONE		CLOSED	CLOSED	BETWEEN CCT 2&3	NONE
RET50-ST13-02B42	ALL		OPEN	OPEN	NONE	BLUE
RET50-ST13-02B43	NONE		OPEN	OPEN	BETWEEN CCT 2&3	NONE
RET50-ST13-02B44	b		OPEN	OPEN	BETWEEN CCT 1&2	NONE
RET50-ST13-02B45	a		OPEN	OPEN	BETWEEN CCT 1&2	NONE
RET50-ST13-02B46	NONE		OPEN	OPEN	NONE	GREEN
RET50-ST13-02B47	NONE		OPEN	OPEN	NONE	BROWN
RET50-ST13-02B48	d		OPEN	OPEN	NONE	BLACK
RET50-ST13-02B49	a c		OPEN	OPEN	NONE	RED
RET50-ST13-02B50	NONE		OPEN	OPEN	NONE	ORANGE
RET50-ST13-02B51	a		OPEN	OPEN	BETWEEN CCT 2&3	RED
RET50-ST13-02B52	NONE		OPEN	OPEN	NONE	BLACK
RET50-ST13-02B53	b c		OPEN	OPEN	NONE	BLACK
RET50-ST13-02B54	NONE		OPEN	CLOSED	BETWEEN CCT 1&2	BLUE
RET50-ST13-02B55	NONE		CLOSED	OPEN	BETWEEN CCT 1&2	RED
RET50-ST13-02B56	NONE		CLOSED	OPEN	BETWEEN CCT 2&3	RED
RET50-ST13-02B57	NONE		CLOSED	CLOSED	NONE	NONE
RET50-ST13-02B58	NONE		OPEN	OPEN	BETWEEN CCT 1&2	NONE
RET50-ST13-02B59	a b c		OPEN	OPEN	NONE	BLACK
RET50-ST13-02B60	a b		OPEN	OPEN	NONE	RED

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.20
.XX ± 0.15
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

RET50-ST13-xx0yy-LF

SERIES

LEADFREE

KEYLOCK TYPE

0-H TYPE

02~10 WAY

HIGH 13.5mm

FEMALE

IDT

DESCRIPTION: 5.0mm Pitch Female IDC

2 CIRCUIT						
PART NUMBER	REMOVED POSITION KEYS	CONFIGURATION	FIRST ENDWALL	LAST ENDWALL	POLARIZING RIB BETWEEN	COLOUR STRIPE
RET50-ST13-02B61	a b c		OPEN	OPEN	NONE	NONE
RET50-ST13-02B62	c		OPEN	OPEN	NONE	RED
RET50-ST13-02B63	a b c		OPEN	OPEN	NONE	BROWN
RET50-ST13-02B64	b c d		OPEN	OPEN	NONE	BLACK
RET50-ST13-02B65	b		OPEN	OPEN	NONE	RED
RET50-ST13-02B66	NONE		OPEN	OPEN	NONE	PURPLE
RET50-ST13-02B67	a c		OPEN	OPEN	NONE	YELLOW
RET50-ST13-02B68	NONE		OPEN	OPEN	NONE	YELLOW
RET50-ST13-02B69	a d		OPEN	OPEN	BETWEEN CCT 2&3	NONE
RET50-ST13-02B70	NONE		OPEN	OPEN	NONE	YELLOW
RET50-ST13-02B71	NONE		CLOSED	OPEN	NONE	NONE
RET50-ST13-02B72	d		OPEN	OPEN	BETWEEN CCT 1&2	NONE
RET50-ST13-02B73	b d		OPEN	OPEN	BETWEEN CCT 1&2	RED
RET50-ST13-02B74	d		CLOSED	CLOSED	NONE	NONE
RET50-ST13-02B75	b c		CLOSED	CLOSED	NONE	NONE

3 CIRCUIT						
PART NUMBER	REMOVED POSITION KEYS	CONFIGURATION	FIRST ENDWALL	LAST ENDWALL	POLARIZING RIB BETWEEN	COLOUR STRIPE
RET50-ST13-03B01	NONE		OPEN	OPEN	NONE	NONE
RET50-ST13-03B02	c d f		OPEN	OPEN	NONE	NONE
RET50-ST13-03B03	a d e		OPEN	OPEN	NONE	NONE
RET50-ST13-03B04	d e f		OPEN	OPEN	NONE	NONE
RET50-ST13-03B05	b c d		OPEN	OPEN	NONE	NONE
RET50-ST13-03B06	a b d		OPEN	OPEN	NONE	NONE
RET50-ST13-03B07	a d e f		OPEN	OPEN	NONE	NONE
RET50-ST13-03B08	b c e		OPEN	OPEN	NONE	NONE
RET50-ST13-03B09	a c d		OPEN	OPEN	NONE	NONE
RET50-ST13-03B10	b d e		OPEN	OPEN	NONE	BLUE
RET50-ST13-03B11	b d e		OPEN	OPEN	NONE	NONE
RET50-ST13-03B12	b c e		OPEN	OPEN	NONE	NONE
RET50-ST13-03B13	e f		OPEN	OPEN	NONE	NONE
RET50-ST13-03B14	b d		OPEN	OPEN	NONE	NONE
RET50-ST13-03B15	f		OPEN	OPEN	NONE	NONE
RET50-ST13-03B16	a f		OPEN	OPEN	NONE	NONE
RET50-ST13-03B17	c d e		OPEN	OPEN	NONE	NONE
RET50-ST13-03B18	NONE		OPEN	OPEN	NONE	BLUE
RET50-ST13-03B19	a b d e f		OPEN	OPEN	NONE	NONE
RET50-ST13-03B20	a b c f		OPEN	OPEN	NONE	NONE
RET50-ST13-03B21	NONE		OPEN	OPEN	NONE	GREEN
RET50-ST13-03B22	b c d e		OPEN	OPEN	NONE	NONE
RET50-ST13-03B23	a d f		OPEN	OPEN	NONE	RED
RET50-ST13-03B24	NONE		OPEN	OPEN	NONE	RED
RET50-ST13-03B25	a c d		OPEN	OPEN	NONE	RED
RET50-ST13-03B26	NONE		OPEN	OPEN	NONE	PURPLE
RET50-ST13-03B27	NONE		CLOSED	CLOSED	BETWEEN CCT 4&5	NONE
RET50-ST13-03B28	a b c		OPEN	OPEN	NONE	NONE
RET50-ST13-03B29	a		OPEN	OPEN	NONE	NONE
RET50-ST13-03B30	c		OPEN	OPEN	NONE	NONE

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.20
.XX ± 0.15
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

RET50-ST13-xx0yy-LF

SERIES

II

II

II

II

LEADFREE

KEYLOCK TYPE

0-H TYPE

02~10 WAY

HIGH 13.5mm

FEMALE

IDT

DESCRIPTION: 5.0mm Pitch Female IDC

3 CIRCUIT						
PART NUMBER	REMOVED POSITION KEYS	CONFIGURATION	FIRST ENDWALL	LAST ENDWALL	POLARIZING RIB BETWEEN	COLOUR STRIPE
RET50-ST13-03B31	d		OPEN	OPEN	NONE	NONE
RET50-ST13-03B32	b c		OPEN	OPEN	NONE	NONE
RET50-ST13-03B33	b		OPEN	OPEN	NONE	NONE
RET50-ST13-03B34	NONE		CLOSED	CLOSED	BETWEEN CCT 1&2	NONE
RET50-ST13-03B35	NONE		CLOSED	CLOSED	NONE	NONE
RET50-ST13-03B36	b c d e		OPEN	OPEN	NONE	BLUE
RET50-ST13-03B37	NONE		OPEN	OPEN	BETWEEN CCT 2&3	NONE
RET50-ST13-03B38	b		OPEN	OPEN	NONE	NONE
RET50-ST13-03B39	a c		OPEN	OPEN	NONE	NONE

4 CIRCUIT						
PART NUMBER	REMOVED POSITION KEYS	CONFIGURATION	FIRST ENDWALL	LAST ENDWALL	POLARIZING RIB BETWEEN	COLOUR STRIPE
RET50-ST13-04B01	NONE		OPEN	OPEN	NONE	NONE
RET50-ST13-04B02	ALL		OPEN	OPEN	NONE	NONE
RET50-ST13-04B03	b c d f		OPEN	OPEN	NONE	NONE
RET50-ST13-04B04	d e f g		OPEN	OPEN	NONE	NONE
RET50-ST13-04B05	a b e f h		OPEN	OPEN	NONE	NONE
RET50-ST13-04B06	d e f g h		OPEN	OPEN	NONE	NONE
RET50-ST13-04B07	c d		OPEN	OPEN	NONE	NONE
RET50-ST13-04B08	b c d e		OPEN	OPEN	NONE	NONE
RET50-ST13-04B09	a b d e g		OPEN	OPEN	NONE	NONE
RET50-ST13-04B10	b e		OPEN	OPEN	NONE	NONE
RET50-ST13-04B11	a b d e g		OPEN	OPEN	NONE	RED
RET50-ST13-04B12	d e f g		OPEN	OPEN	NONE	NONE
RET50-ST13-04B13	a b e f h		OPEN	OPEN	NONE	NONE
RET50-ST13-04B14	NONE		OPEN	OPEN	NONE	BLUE
RET50-ST13-04B15	a c e g		OPEN	OPEN	NONE	NONE
RET50-ST13-04B16	a b d f g h		OPEN	OPEN	NONE	NONE
RET50-ST13-04B17	c d e f g		OPEN	OPEN	NONE	NONE
RET50-ST13-03B18	f g h		OPEN	OPEN	NONE	NONE
RET50-ST13-04B19	a c d f g		OPEN	OPEN	NONE	NONE
RET50-ST13-04B20	a b c d e f		OPEN	OPEN	NONE	NONE
RET50-ST13-04B21	a d g		OPEN	OPEN	NONE	BROWN
RET50-ST13-04B22	a b f g h		OPEN	OPEN	NONE	BROWN
RET50-ST13-04B23	NONE		OPEN	OPEN	NONE	GREEN
RET50-ST13-04B24	d f h		OPEN	OPEN	NONE	NONE
RET50-ST13-04B25	c e f g h		OPEN	OPEN	NONE	NONE
RET50-ST13-04B26	a d g		OPEN	OPEN	NONE	NONE
RET50-ST13-04B27	a b f g h		OPEN	OPEN	NONE	NONE
RET50-ST13-04B28	b d e		OPEN	OPEN	NONE	NONE
RET50-ST13-04B29	a b c d g		OPEN	OPEN	NONE	NONE
RET50-ST13-04B30	NONE		CLOSED	CLOSED	BETWEEN CCT 3&4	NONE



煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.20
.XX ± 0.15
.XXX ±
ANG ±

PPOJECTION 

照片框

ORDER INFORMATION

RET50-ST13-xx0yy-LF

SERIES

LEADFREE

KEYLOCK TYPE

0-H TYPE

02~10 WAY

HIGH 13.5mm

FEMALE

IDT

DESCRIPTION: 5.0mm Pitch Female IDC

4 CIRCUIT						
PART NUMBER	REMOVED POSITION KEYS	CONFIGURATION	FIRST ENDWALL	LAST ENDWALL	POLARIZING RIB BETWEEN	COLOUR STRIPE
RET50-ST13-04B31	NONE		OPEN	OPEN	BETWEEN CCT 4&5	NONE
RET50-ST13-04B32	NONE		OPEN	OPEN	BETWEEN CCT 3&4	NONE

5 CIRCUIT						
PART NUMBER	REMOVED POSITION KEYS	CONFIGURATION	FIRST ENDWALL	LAST ENDWALL	POLARIZING RIB BETWEEN	COLOUR STRIPE
RET50-ST13-05B01	NONE		OPEN	OPEN	NONE	NONE
RET50-ST13-05B02	c e f h		OPEN	OPEN	NONE	NONE
RET50-ST13-05B03	b d f g i		OPEN	OPEN	NONE	NONE
RET50-ST13-05B04	c e g h		OPEN	OPEN	NONE	NONE
RET50-ST13-05B05	a c		OPEN	OPEN	NONE	NONE
RET50-ST13-05B06	NONE		OPEN	OPEN	NONE	RED
RET50-ST13-05B07	b d f h j		OPEN	OPEN	NONE	BLACK
RET50-ST13-05B08	NONE		OPEN	OPEN	NONE	BLACK
RET50-ST13-05B09	b d e f h j		OPEN	OPEN	NONE	BLACK
RET50-ST13-05B10	b c e g h		OPEN	OPEN	NONE	NONE
RET50-ST13-05B11	NONE		CLOSED	OPEN	NONE	NONE
RET50-ST13-05B12	a b		OPEN	OPEN	NONE	NONE
RET50-ST13-05B13	NONE		OPEN	OPEN	BETWEEN CCT 1&2	NONE
RET50-ST13-05B14	b c d e f g i j		OPEN	OPEN	NONE	NONE

6 CIRCUIT						
PART NUMBER	REMOVED POSITION KEYS	CONFIGURATION	FIRST ENDWALL	LAST ENDWALL	POLARIZING RIB BETWEEN	COLOUR STRIPE
RET50-ST13-06B01	NONE		OPEN	OPEN	NONE	NONE
RET50-ST13-06B02	d e f g h i		OPEN	OPEN	NONE	NONE
RET50-ST13-06B03	c d e h i j		OPEN	OPEN	NONE	NONE
RET50-ST13-06B04	a b e f g h k l		OPEN	OPEN	NONE	NONE
RET50-ST13-06B05	a b e f h i k		OPEN	OPEN	NONE	NONE
RET50-ST13-06B06	b c f g j k		OPEN	OPEN	NONE	NONE
RET50-ST13-06B07	a d e f g h i l		OPEN	OPEN	NONE	NONE
RET50-ST13-06B08	NONE		OPEN	OPEN	NONE	BLUE
RET50-ST13-06B09	a b c d e f i j k l		OPEN	OPEN	NONE	NONE
RET50-ST13-06B10	NONE		OPEN	OPEN	NONE	GREEN
RET50-ST13-06B11	c d f h i j		OPEN	OPEN	NONE	NONE
RET50-ST13-06B12	a b c d g i j k l		OPEN	OPEN	NONE	NONE
RET50-ST13-06B13	NONE		OPEN	OPEN	NONE	BLACK
RET50-ST13-06B14	b d e f h j		OPEN	OPEN	NONE	BLACK
RET50-ST13-06B15	c d e f g h l		OPEN	OPEN	NONE	NONE
RET50-ST13-06B16	c d e f h j k		OPEN	OPEN	NONE	NONE
RET50-ST13-06B17	NONE		CLOSED	CLOSED	BETWEEN CCT 5&6	NONE
RET50-ST13-06B18	NONE		CLOSED	CLOSED	NONE	NONE

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.20
.XX ± 0.15
.XXX ±
ANG ±

照片框

ORDER INFORMATION

RET50-ST13-xx0yy-LF

SERIES

FEMALE
IDT

LEADFREE
KEYLOCK TYPE
0-H TYPE
02~10 WAY
HIGH 13.5mm

DESCRIPTION: 5.0mm Pitch Female IDC

煜倫股份有限公司

www.morethanall.com

7 CIRCUIT						
PART NUMBER	REMOVED POSITION KEYS	CONFIGURATION	FIRST ENDWALL	LAST ENDWALL	POLARIZING RIB BETWEEN	COLOUR STRIPE
RET50-ST13-07B01	NONE		OPEN	OPEN	NONE	NONE
RET50-ST13-07B02	c d g h i j k		OPEN	OPEN	NONE	NONE
RET50-ST13-07B03	a c d f g		OPEN	OPEN	NONE	NONE
RET50-ST13-07B04	NONE		CLOSED	CLOSED	NONE	NONE
RET50-ST13-07B05	NONE		OPEN	OPEN	NONE	ORANGE

8 CIRCUIT						
PART NUMBER	REMOVED POSITION KEYS	CONFIGURATION	FIRST ENDWALL	LAST ENDWALL	POLARIZING RIB BETWEEN	COLOUR STRIPE
RET50-ST13-08B01	NONE		OPEN	OPEN	NONE	NONE
RET50-ST13-08B02	NONE		OPEN	OPEN	BETWEEN CCT 2&3	NONE

9 CIRCUIT						
PART NUMBER	REMOVED POSITION KEYS	CONFIGURATION	FIRST ENDWALL	LAST ENDWALL	POLARIZING RIB BETWEEN	COLOUR STRIPE
RET50-ST13-09B01	NONE		OPEN	OPEN	NONE	NONE
RET50-ST13-09B02	b c d e f g i j		OPEN	OPEN	NONE	NONE

10 CIRCUIT						
PART NUMBER	REMOVED POSITION KEYS	CONFIGURATION	FIRST ENDWALL	LAST ENDWALL	POLARIZING RIB BETWEEN	COLOUR STRIPE
RET50-ST13-10B01	NONE		OPEN	OPEN	NONE	NONE
RET50-ST13-10B02	NONE		OPEN	OPEN	BETWEEN CCT 17&18	NONE
RET50-ST13-10B03	NONE		OPEN	OPEN	BETWEEN CCT 8&9	NONE

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.20
.XX ± 0.15
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

RET50-ST13-xx0yy-LF

SERIES

LEADFREE

KEYLOCK TYPE

0-H TYPE

02~10 WAY

HIGH 13.5mm

FEMALE

IDT

DESCRIPTION: 5.0mm Pitch Female IDC