

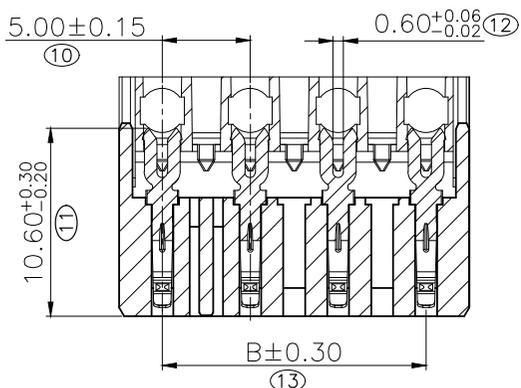
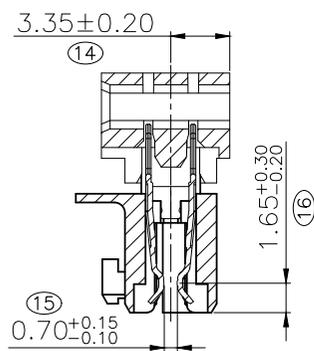


Specifications  
 Current Rating:6.0Amp.  
 Insulation Resistance:1000MΩMin.  
 Dielectric Withstanding Voltage:1200VAC.  
 Contact Resistance:10mΩMax.  
 Operating Temperature: -40°C to +120°C.  
 Materials  
 Contact Material:Phosphor Bronze.  
 Insulator Material:Thermoplastic,  
 UL 94V-0 (PBT ,NYLON 66) or the

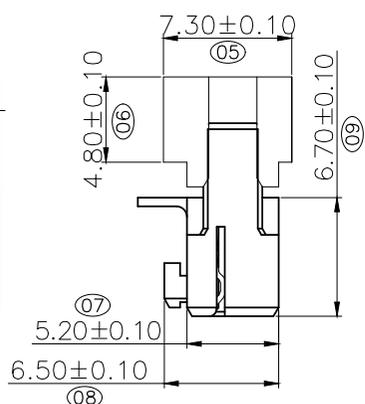



SECTION E-E

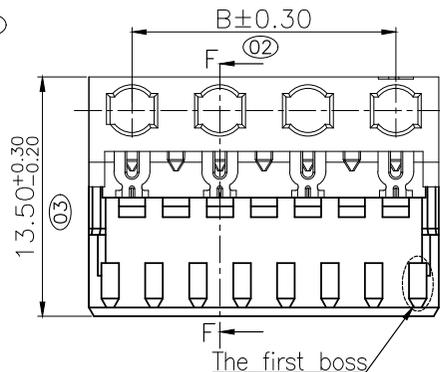

SECTION F-F

Spacer bar	C	D
0		
1	2.45	0
2	4.95	2.50
3	7.45	5.00
4	9.95	7.50
5	12.45	10.00
6	14.95	12.50
7	17.45	15.00
8	19.95	17.50
9	22.45	20.00
A	24.95	22.50
B	27.45	25.00
C	29.95	27.50
D	32.45	30.00
E	34.95	32.50
F	37.45	35.00
G	39.95	37.50
H	42.45	40.00

Pin NO.	A	B
02	9.90	5.00
03	14.90	10.00
04	19.90	15.00
05	24.90	20.00
06	29.90	25.00
07	34.90	30.00
08	39.90	35.00
09	44.90	40.00

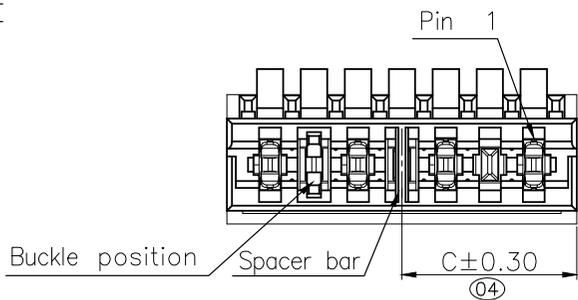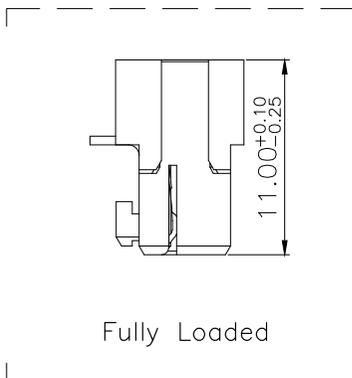

Note:  
1.The first boss is consistent with the direction of the first pin.

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X ± 0.30

.X ± 0.25

.XX ± 0.15

.XXX ± 0.10

ANG ±

PJECTION

照片框

ORDER INFORMATION

RET50-ST1320-xx0yy-LF

SERIES  
 FEMALE  
 IDT  
 LEADFREE  
 A-G TYPE  
 D0 TYPE  
 02-09 WAY  
 20 AWG  
 HIGH 13.5mm

DESCRIPTION: RASTLink 5.0mm Single Row Female Connector

