

Notes:

1. Material:

Contact: High Performance Copper Alloy
 Shielding Cover: High Performance Copper Alloy
 Housing: High Temperature Theroplastic.

2. Finish:

Contact: 30u" Nickel Underplating Overall. Gold Flash on Contact Area & Soldertail.
 Shielding Cover: 30u" Nickel Underplating Overall.
 See Order Information on Contact Area & Soldertail.








△說明:

1. 材料:


訊號端子: 高性能銅合金
 外殼: 高性能銅合金
 塑膠: 高溫熱塑性塑膠

2. 電鍍:

訊號端子: 30u" 鍍底, 接觸區域與焊錫區域刷薄金
 外殼: 30u" 鍍底, 接觸區域及焊錫區域電鍍如料號選項

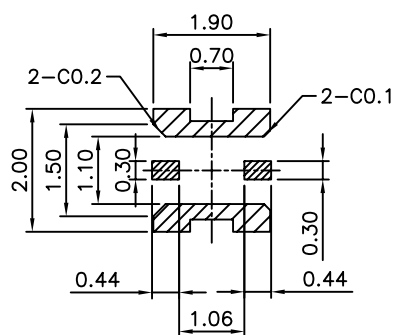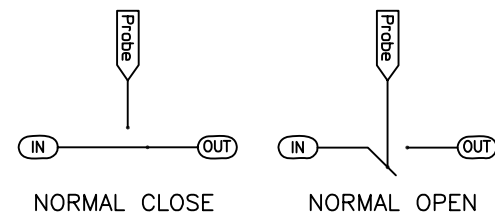

Recommnd PCB Layout

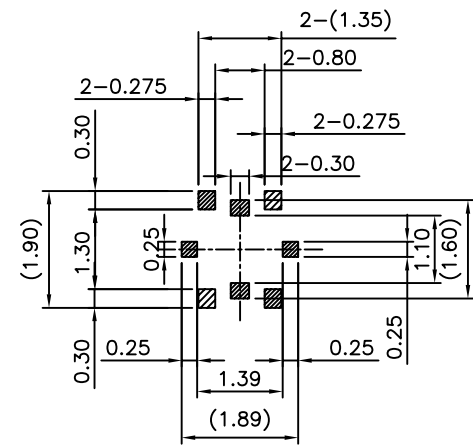

Recommnd Stencil Mask Pattern
 (Mask Thickness 0.10mm)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4 PPROJECTION

X, ±
 .X ± 0.25
 .XX ± 0.10
 .XXX ± 0.06
 ANG ±

照片框

ORDER INFORMATION

RFS12-JV08-50-LF

SERIES LEADFREE
 50 OHM
 HIGH 0.85mm
 180°SMT
 JACK

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: