

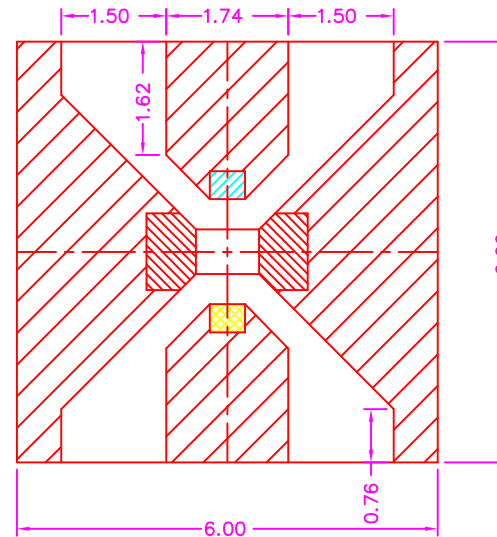
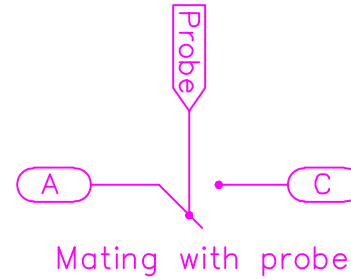
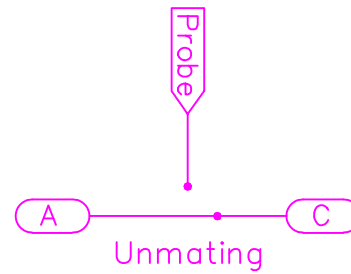








P.C.B. LAYOUT
TOP VIEW ± 0.05

MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BLACK
SHELL: COPPER ALLOY, GOLD PLATING
TERMINAL: COPPER ALLOY, GOLD PLATED

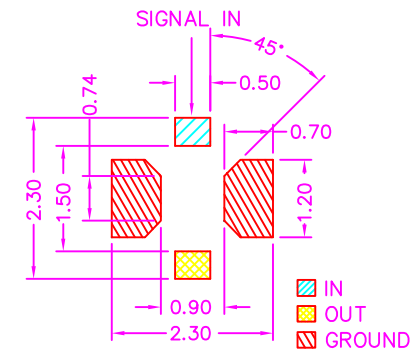

RECOMMEND STENCIL MASK PATTERN
(MASK THICKNESS 0.10~0.12mm)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ± 0.40

.X, ± 0.30

.XX, ± 0.20

.XXX, ± 0.10

ANG $\pm$




PPOJECTION

照片框

ORDER INFORMATION

RFS-JV09R-50-LF
SERIES | | | | LEADFREE
50 OHM
REEL
HIGH 0.9mm
180° SMT
JACK

DESCRIPTION: RF SWITCH (MICROWAVE SWITCH COAXIAL) MODEL 3, SMT

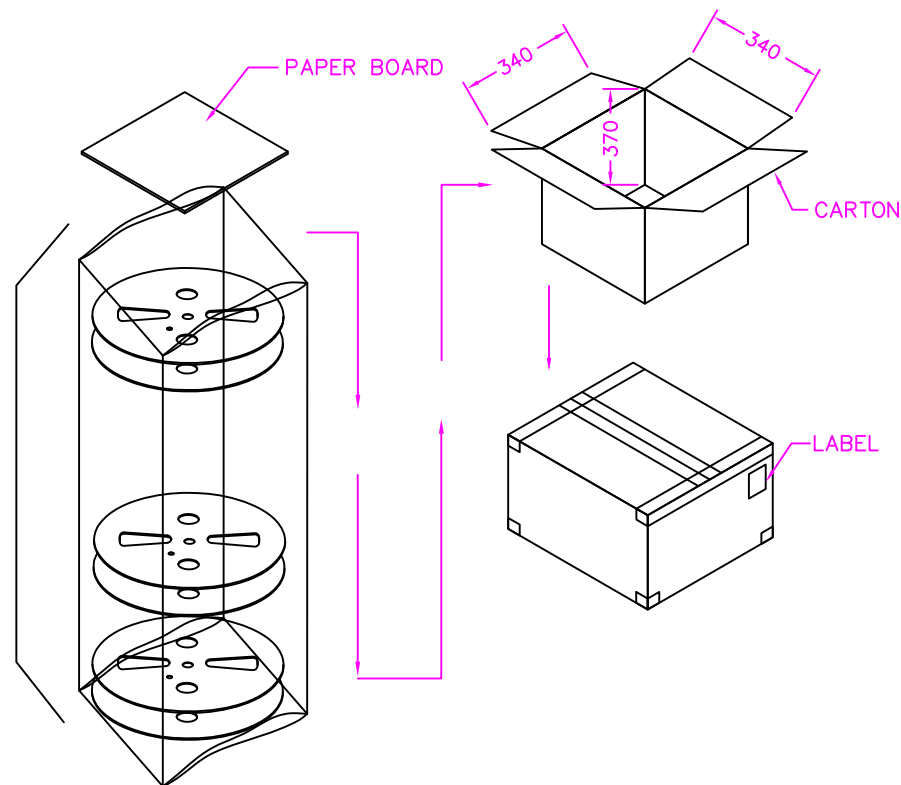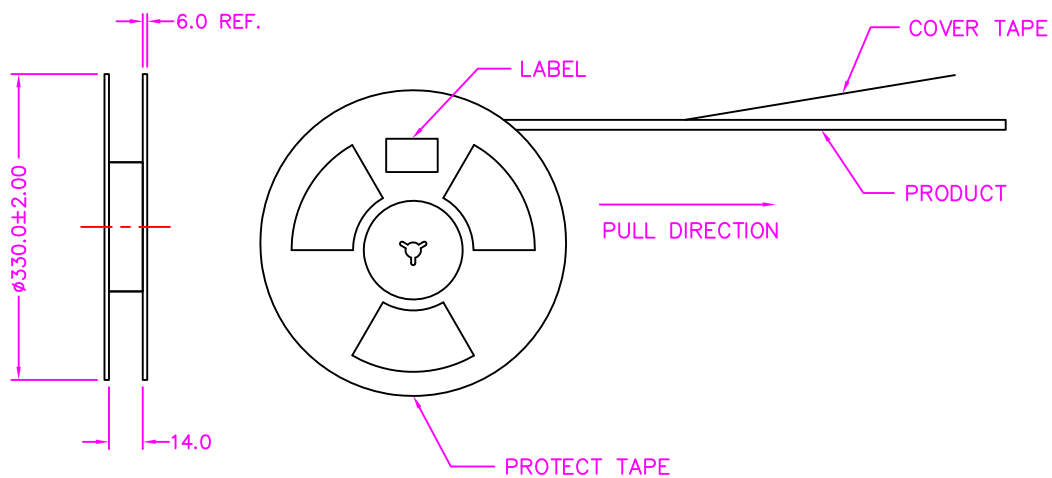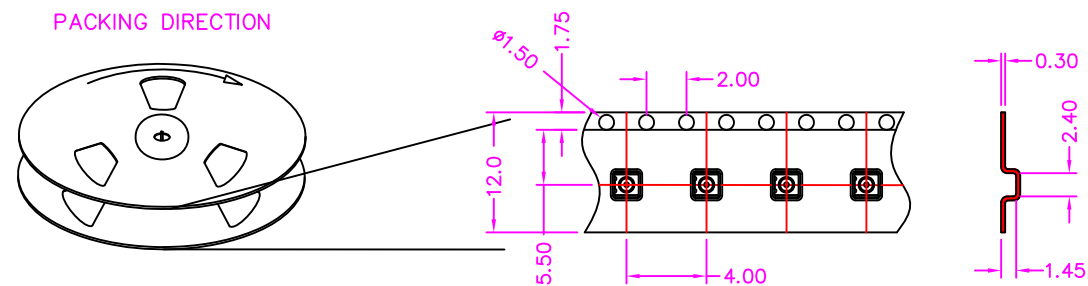

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.40

.X ± 0.30

.XX ± 0.20

.XXX ± 0.10

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

RFS-JV09R-50-LF
SERIES REEL HIGH 0.9mm
180° SMT JACK
LEADFREE
50 OHM

DESCRIPTION: RF SWITCH (MICROWAVE SWITCH COAXIAL) MODEL 3, SMT