


1. DIMENSION

Unless otherwise specified all Dimensions in millimeters & inches. Values in brackets are inches equivalents.

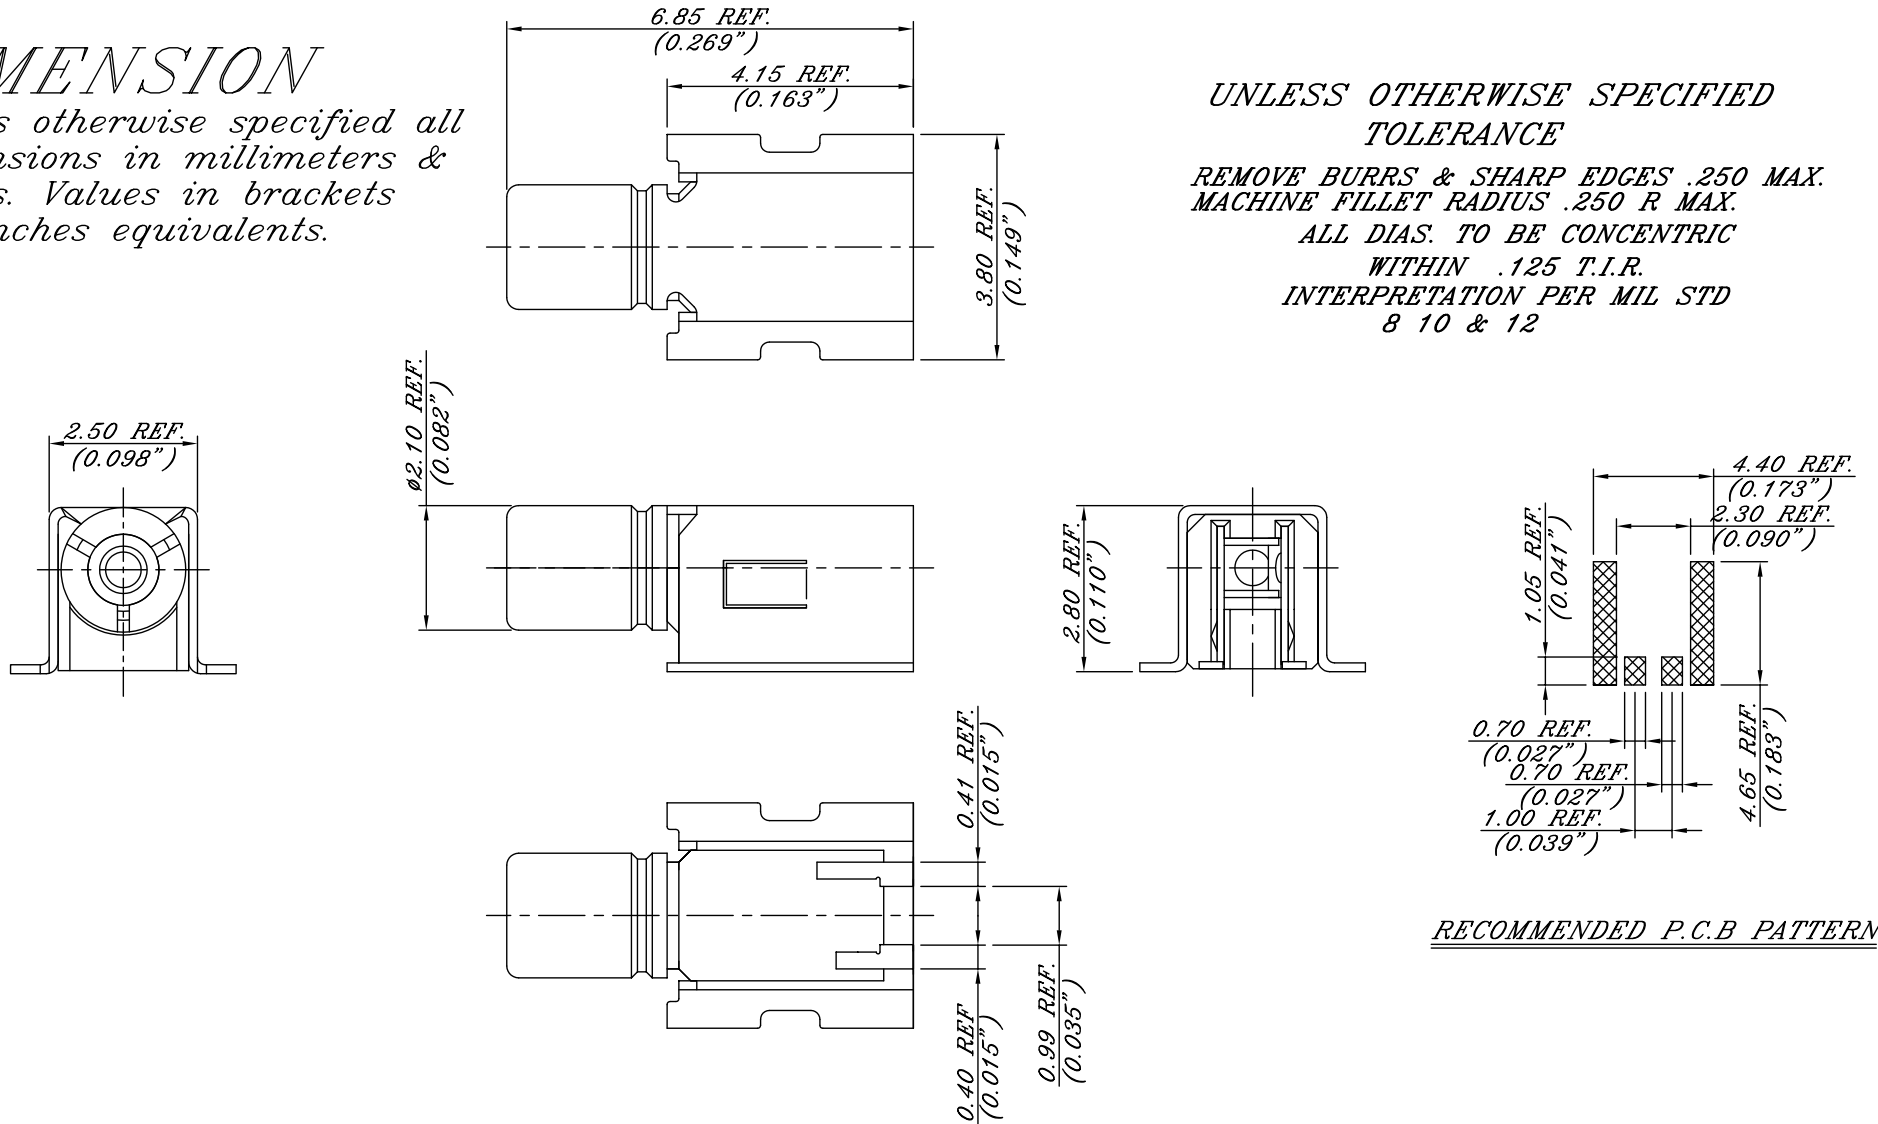

UNLESS OTHERWISE SPECIFIED
TOLERANCE
REMOVE BURRS & SHARP EDGES .250 MAX.
MACHINE FILLET RADIUS .250 R MAX.
ALL DIAS. TO BE CONCENTRIC
WITHIN .125 T.I.R.
INTERPRETATION PER MIL STD
8 10 & 12

RECOMMENDED P.C.B PATTERN

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. ±

CHECKED BY GENIUS

.X ±

UNIT / mm

SCALE 1 : 1

.XX ±

DATE

.XXX ±

ANG ±

SIZE A4

PJECTION

照片框

ORDER INFORMATION

RFT-JW-50-LF
SERIES | LEADFREE
50 OHM
90° SMT
JACK

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: MICROWAVE R/A SWITCH CONNECTOR