

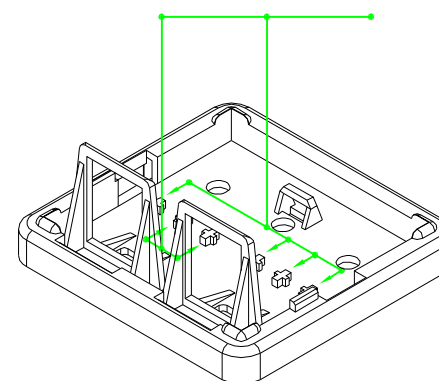
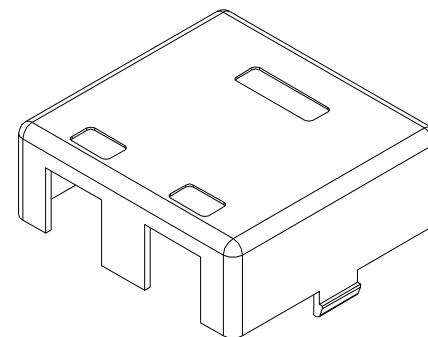
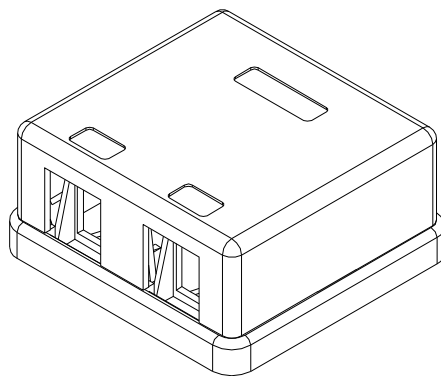
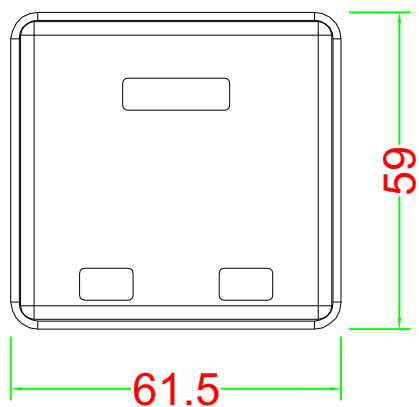


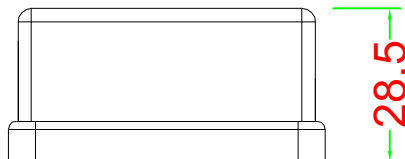

[Pruneable Design]
Prune the pillar height
to suit keystone base
if necessary



Materials:

Body : Fireproof ABS UL-94V0

Operation Temperature : -40 °C ~ +70 °C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

RJ-SJ-XB-LF
SERIES | LEADFREE
NON PORTS
SURFACE JACK

DESCRIPTION: