


A	COLOR	B
1	BLACK	1
2	RED	2
3	WHITE	3
4	YELLOW	4

PACKING

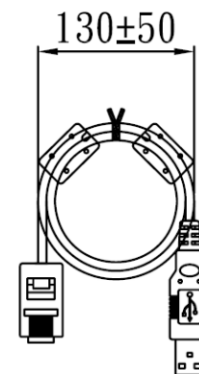

NOTES:

1. ALL DIMENSIONS ARE "mm".
2. THE PRODUCT MUST BE COMPLY WITH THE DIRECTIVE OF ROHS.

ELECTRICAL TESTING:

1. 100% OPEN/SHORT TEST
2. CONTACT RESISTANCE: 2Ω
3. INSULATION RESISTANCE: 5MΩ Min 300V

NO.	ITEM.	DESCRIPTION	Q'TY	UL/CSA No.
1	CABLE:	UL 2725#28*4C(BLACK, RED, WHITE, YELLOW) +T JACKET: BEIGE OD: Ø3.8	1pcs	E238846
2	CONN:	4P4C PLUG 3U" V2	1pcs	E137614
3	CONN:	USB A TYPE M 4P WHITE 30U"	1set	
4	OUT MOLDER:	PVC 45P WARM GREY 2C NO. :GH-016	8.5g	E212928
5	CORE:	K5B RH Ø9.5*19.5*Ø5.0	2pcs	
6	OUT MOLDER:	PVC 45P WARM GREY 2C NO. :GH-076	12g	E212928
7	MINI TIE:	GREY L:100	1pcs	
8				

RoHS Compliant



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4 PPROJECTION

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

RJUB-044A28FC2BG-M1M8-LF
 SERIES | LEADFREE
 1800mm
 MALE TO MALE
 BEIGE
 FERRITE CORE x2
 28AWG
 4 PIN TO 4 PIN A TYPE

DESCRIPTION: