
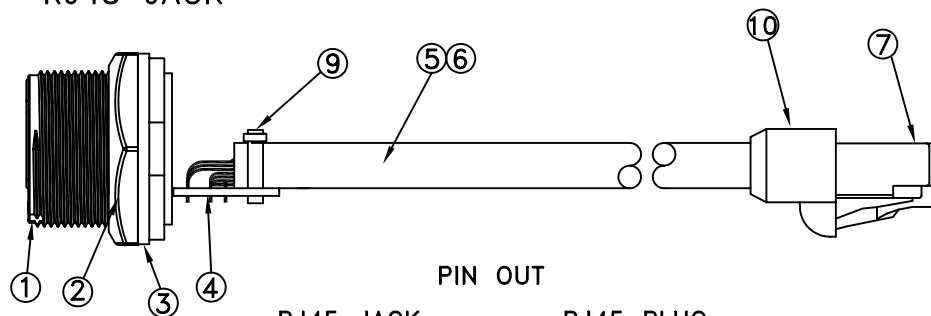
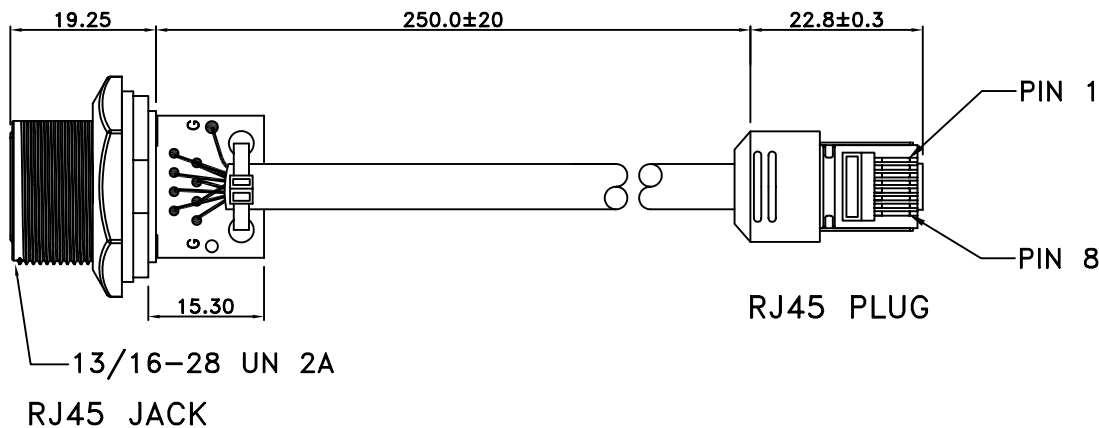



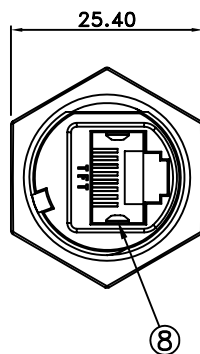

RJ45 JACK		RJ45 PLUG	
1	WHITE/ORANGE	1	
2	ORANGE	2	
3	WHITE/GREEN	3	
6	GREEN	6	
4	BLUE	4	
5	WHITE/BLUE	5	
7	WHITE/BROWN	7	
8	BROWN	8	
SHIELD	DRAIN	SHIELD	

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

RJWRJ-080824-E25C-LF

SERIES

LEADFREE

250mm

MALE TO FEMALE

24 AWG

8P8C

DESCRIPTION: C3 RJ45 SHIELDED SCREW FOR PANEL 180° WITH PIG TAIL PLUG

****NOTES:**

1. HOUSING: NYLON66 94V-0 UV BLACK COLOR.
2. NUT: NYLON66 94V-0 UV BLACK COLOR.
3. GASKET: SILICONE 94V-0 BLACK COLOR.
4. PCB: FR-4 94V-0 T=1.0mm.
5. SHRINK TUBE: $\varnothing 6.0\text{mm}$ BLACK COLOR.
6. CABLE: CAT5E (24AWG*4P)+MEA OD=6.0 $\pm$ 0.2mm GRAY.
(BLACK PVC JACKET DIVEST)
7. RJ45 PLUG: 8P8C PLUG GOLD PLATED.
8. EMI PLATED: COPPER ALLOY NICKEL PLATED.
9. CABLE TIE: NYLON WHITE COLOR.
10. HOOD: PVC BLUE COLOR.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$

.X, $\pm$

.XX, $\pm$

.XXX, $\pm$

ANG, $\pm$

PROJECTION 

照片框

ORDER INFORMATION

RJWRJ-0808-E25C-LF

SERIES

8P8C

LEADFREE

250mm

MALE TO FEMALE

DESCRIPTION: C3 RJ45 SHIELDED SCREW FOR PANEL 180° WITH PIG TAIL PLUG