



P1  
PLUG 6P4C 3U"




P2  
PLUG 6P4C 3U"



1500±30

CONDUCTORS

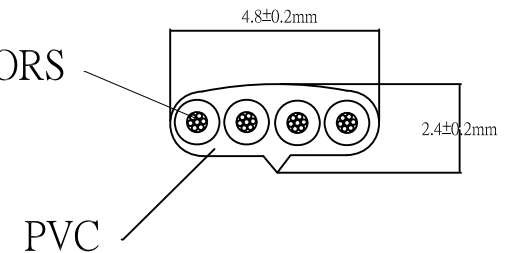

SPECIFICATION:

1.COMPONENT:

- A.Size of conductors Tinse : 4C NO UL 28AWG(7\*0.12) "ROHS"
- B.Color coded insilation : (P.P)Yellow.Green.Red.Black
- C.Diameter of electric: 0.95±0.03mm.

2.PLUG:Modular U.S F type 6p4c ,golden plate 3u"\*2

3.JACKET MATERIAL. :PVC.

- A.Overall diameter :Ave 4.8\*2.4mm
- B.Color. :black

WIRING:P1-P1

P1	COLOR	P2
1	N.C	1
2	black	2
3	red	3
4	green	4
5	yellow	5
6	N.C	6

NOTE: All Materials/Processes are RoHS Compliant

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

P PROJECTION

照片框

ORDER INFORMATION

RJX2-060428-M1M5-LF  
SERIES | | | LEADFREE  
| | | 1500mm  
| | | MALE TO MALE  
| | | 28 AWG  
| | | 6P4C TO 6P4C

DESCRIPTION: NO UL 6P6C PLUG L:1.5M BLACK