


P1  
PLUG 6P4C 3U"

P2  
PLUG 6P4C 3U"

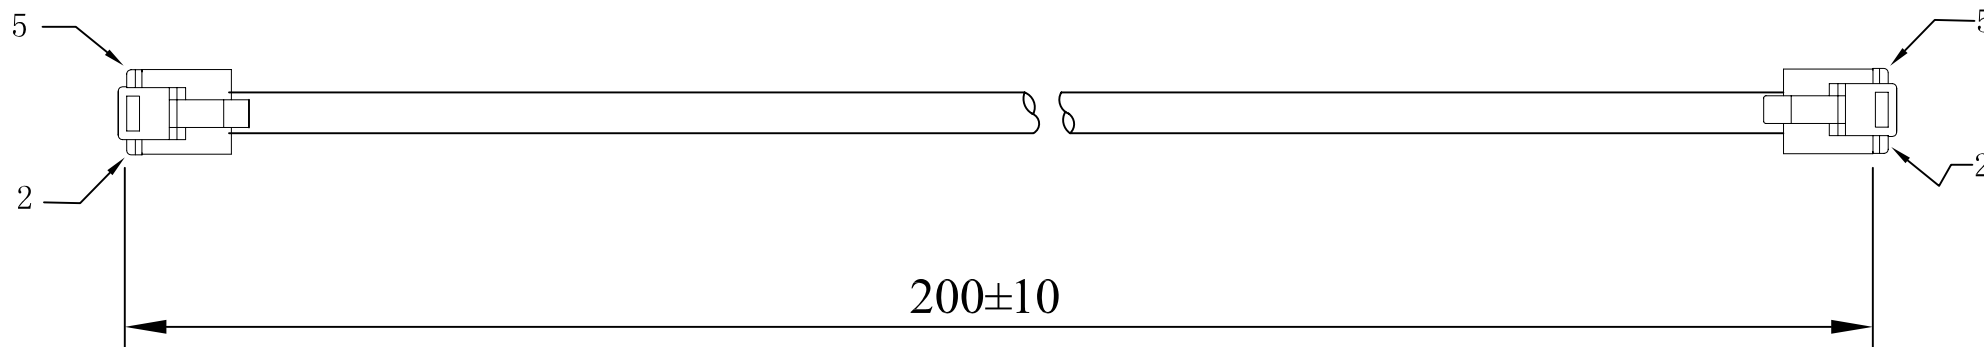

SPECIFICATION:

1.COMPONENT:

- A.Size of conductors Tinse : 4C NO UL 28AWG(7\*0.12) "ROHS"
- B.Color coded insilation :(P.P)Yellow.Green.Red.Black
- C.Diameter of electric:0.95±0.03mm.

2.PLUG:Modular U.S F type 6p4c ,golden plate 3u"\*2

3.JACKET MATERIAL. :PVC.

- A.Overall diameter :Ave 4.8\*2.4mm
- B.Color. :black

WIRING:P1-P1

P1	COLOR	P2
3	—	3
4	—	4
2	—	2
5	—	5

NOTE: All Materials/Processes are RoHS Compliant

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1:1

DATE

SIZE A4

X.±  
.X±  
.XX±  
.XXX±  
ANG±

PPOJECTION

照片框

ORDER INFORMATION

RJX2-060428-M20C-LF  
SERIES | | | LEADFREE  
| | | 200mm  
| | | MALE TO MALE  
| | | 28 AWG  
| | | 6P4C TO 6P4C

DESCRIPTION: NO UL 6P4C PLUG L:200mmBLACK