


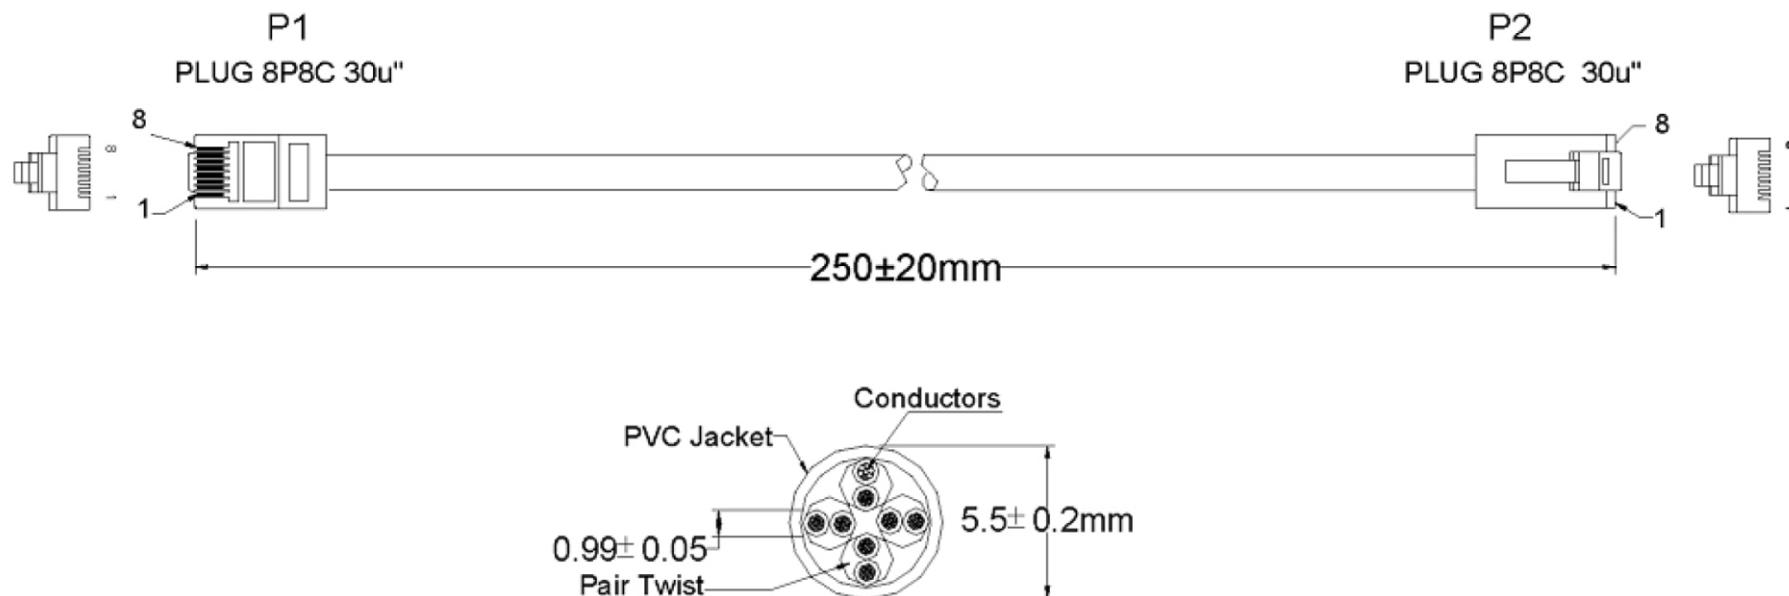

SPECIFICATION:

1.COMPONENT:

- A.Size of conductors :CAT.5e 24AWG (0.20*7) Copper Stranded Cable.
- B.Color coded insulation : (P.P)Green,White/Green ;Brown,White/Brown;
Blue;White/Blue;Orange,White/Orange.
- C.Diameter of electric :0.99±0.05mm.
- D.UL style no.of single : (30v, 75°c).
- E.Number of twist pairs :Four pairs.

2.JACKET MATERIAL.

- A.Overall diameter :Ave 5.5mm
- B.Color. : BLACK.

3.PLUG TYPE.

- MATERIAL: :PC UL 94V-2

WIRING: 568B

P1	COLOR	P2
1	White/Orange	1
2	Orange	2
3	White/Green	3
6	Green	6
4	Blue	4
5	White/ Blue	5
7	White/Brown	7
8	BROWN	8

NOTE: xx TWISTED PAIR

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ±

UNIT / mm

SCALE 1 : 1

.XXX ±

DATE

ANG ±

SIZE A4

PPOJECTION



ORDER INFORMATION

RJX2-080824C5E-M25C-LF	
SERIES	LEADFREE
24 AWG	250mm
08 TO 08 WAY	MALE TO MALE
	CAT.5e

DESCRIPTION:

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com