


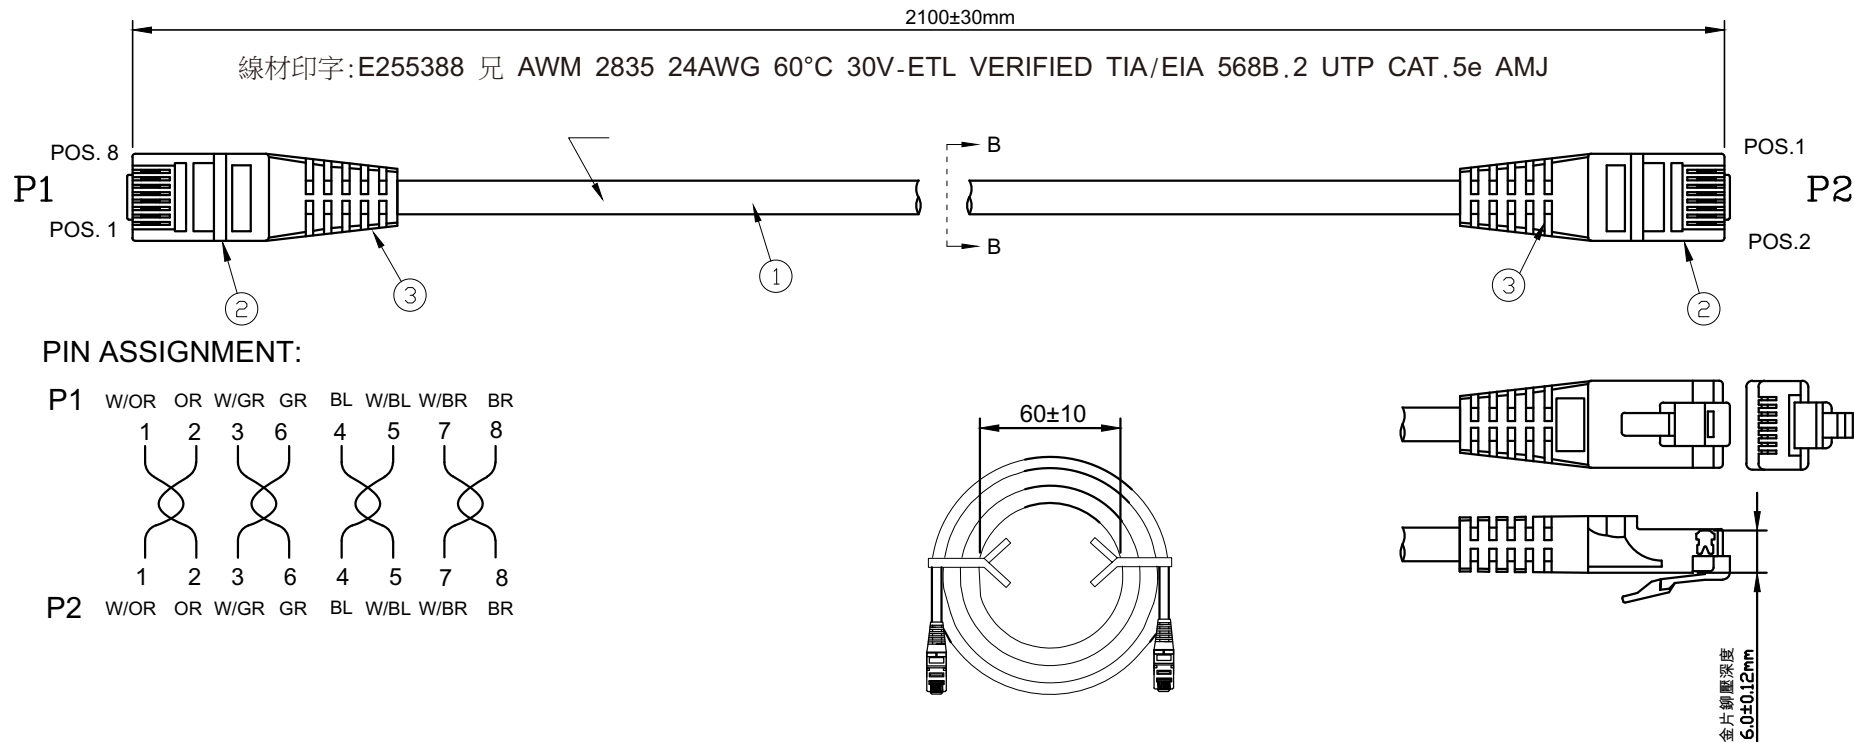

NOTE(說明) :

1. OPEN/SHORT/INTERMITTENCE 100% TEST.
(產品必須100%進行斷路、短路及間隙性接觸測試)
2. DIELECTRIC STRENGTH:200 VOLTS AC 2mA MAX/0.02S.
(絕緣強度:200V AC 2mA MAX/0.02S)
3. INSULATION RESISTANCE:300V DC/0.02SEC, 10Ω MIN.
(絕緣阻抗:300V DC/0.02SEC, 10Ω MIN)
4. CONDUCTIVE RESISTANCE:5Ω MAX.
(導通阻抗:5Ω MAX)
5. RoHS&REACH COMPLIANCE

1	CABLE	CAT.5E UTP 24AWG*4P OD:5.0±0.2MM PVC COLOR:BLACK	2
2	CONNETOR	RJ45 8P8C PLUG,FU" 埴孔	2
3	MOLDED	60P PVC BLACK	1
NO	NAME	Description	Q' TY

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

RJX2-080824C5E-M2M1-LF

SERIES

LEADFREE
2100mm
MALE TO MALE
CAT.5E
24 AWG
8P8C TO 8P8C

DESCRIPTION: