


P1  
PLUG 8P8C SHIELDED R 50u"

P2  
PLUG 8P8C SHIELDED R 50u"

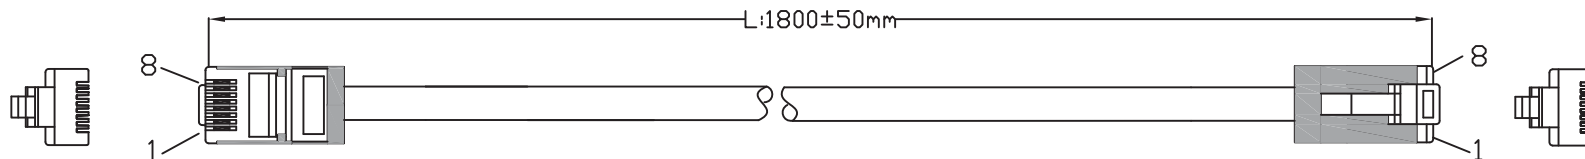



WIRING: 568B

P1 0000R P2

1	White/Orange	1
2	Orange	2
3	White/Green	3
6	Green	6
4	Blue	4
5	White/Blue	5
7	White/Brown	7
8	BROWN	8

Drain Wire to Drain Wire

NOTE: XX TWISTED PAIR

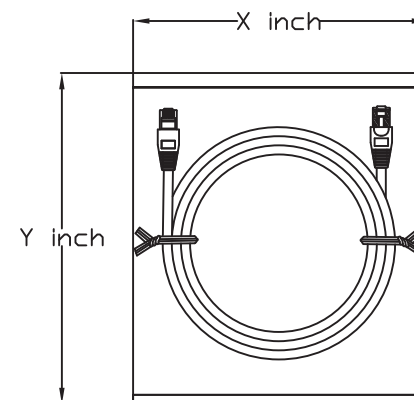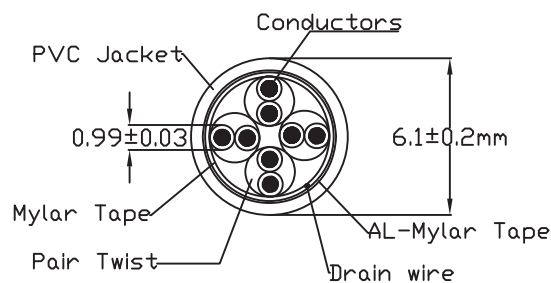

## SPECIFICATION:

### CABLE COMPONENT:

- |                           |  |
|---------------------------|--|
| A. Size of conductors     | : STP CAT.5e 24AWG (0.20*7) stranded round cable.  |
| B. Color coded insulation | : (P.P) green, white/green ; brown, white/brown ; blue, white/blue ; orange, white/orange. |
| C. Diameter of dielectric | : 0.99±0.05mm.   |
| D. UL style no. of single | : (30v, 75°C).   |
| E. Number of twist pairs  | : Four pairs.  |
| F. Plenum Shield          | : Mylar Tape, Drain Wire, Braid, AL-Mylar Tape.  |

### 2. JACKET MATERIAL PVC

- |                     |             |
|---------------------|-------------|
| A. Overall diameter | : Ave 6.1mm |
| B. Color,           | : GREY      |

### 3. PRINTING:

- |       |              |   |
|-------|--------------|---|
| PLUG: | 1. TYPE      | : Modular U.S. R shielded TYPE 8P8C ,golden plate 50u". |
|       | 2. MATERIAL: | : PC UL 94V-2   |

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

照片框

## ORDER INFORMATION

RJX2-080824C5EFM-M1M8-LF

SERIES

8P8C

24 AWG

CAT.5E

FULL METAL

MALE TO MALE

1800mm

LEADFREE

DESCRIPTION: STP CAT5E L:1.5M BREY