

SPECIFICATION:

CABLE: 1.COMPONENT:

- | | |
|--------------------------|---|
| A.Size of conductors | :UTP CAT.5e 24AWG (7*0.20) stranded round cable. |
| B.Color coded insulation | :(HDPE) White/orange-orange,white/green-green, white/blue-blue,white/brown-brown. |
| C.Diameter of electric | :0.99±0.05mm. |
| D.UL style no.of single | :(30v, 75'c). |
| E.Number of twist pairs | :Four pairs. |
| F.Plenum Shield | :MICA Tape. |

2.JACKET MATERIAL :PVC(Heat resistant -40°Cs--80°C anti-UV)

- | | |
|--------------------|------------|
| A.Overall diameter | :Ave 5.5mm |
| B.Color. | :Black |

PLUG: 1.TYPE

:RJ45 U.S 8P8C R 3u" LONG TYPE.

2.MATERIAL


:PC UL 94v-2

SR: 1.TYPE

:MOLDING SR

2.MATERIAL

:PVC 75P BLACK

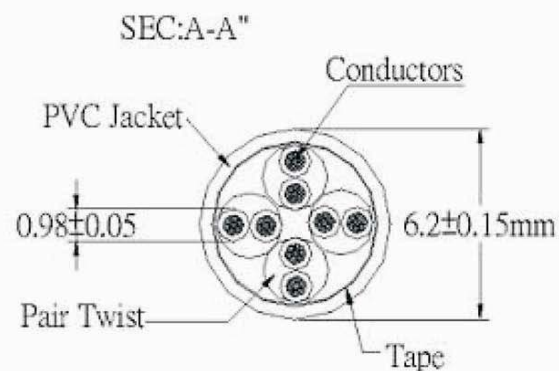

WIRING: 568B

P1	COLOR	P2
1	WH-OR	1
2	ORANGE	2
3	WH-GR	3
6	GREEN	6
4	BLUE	4
5	WH-BL	5
7	WH-BR	7
8	BROWN	8

NOTE:∞TWISTED PAIR

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

RJX2-080824C5EKVBK-M1M5-LF

SERIES

8P8C
24 AWG

CAT.5E

BLACK PVC

MALE TO MALE

1500mm

LEADFREE

DESCRIPTION: