


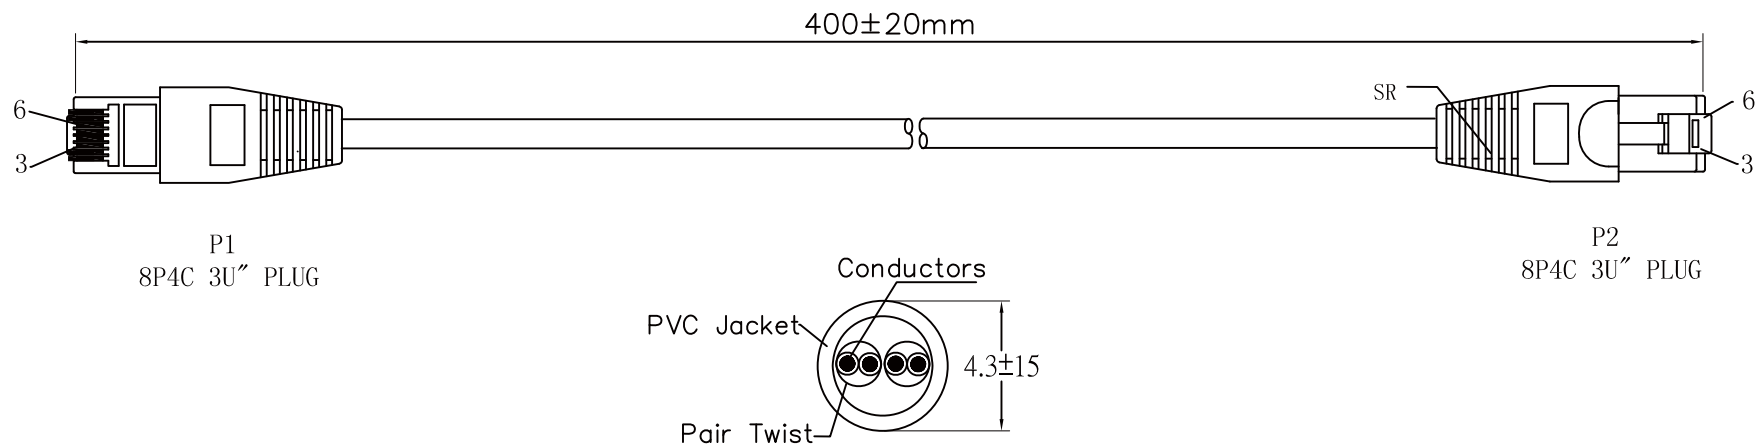

SPECIFICATION:

CABLE COMPONENT:

- Size of conductors : UTP CAT.5e 24AWG (0.20*7) round cable"ROHS".
- Color coded insulation : (P.P)white/orange—orange,white/green—green;
- Diameter of electric : $0.99\pm 0.05\text{mm}$.
- UL style no.of single : (30v, 60°C).
- Number of twist pairs : Two pairs.

2.JACKET MATERIAL. :PVC

- Overall diameter : Ave 4.3mm
- Color. : RED.

PLUG1.TYPE :Modular U.S F type 8p4c ,golden flash 3u".

2.MATERIAL :PC UL 94v-2

ELECTRONIC TEST:

- OPEN/SHORT/INTERMITTENCE:100%TEST.
- INSULATION RESISTANCE:300V DC/10MΩ.(MIN)
- CONDUCTIVE RESISTANCE:2Ω.(MAX)

WIRING DIAGRAM:

P1	COLOR	P2
3	WH/OR	4
4	Orange	3
5	Blue	6
6	WH/BU	5

NOTE:∞ TWISTED PAIR

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X.±
.X±
.XX±
.XXX±
ANG±

照片框

ORDER INFORMATION

RJX2-080824C5ERV-M40C-LF

SERIES

8P8C

24 AWG

CAT.5E

REVERSED

400mm

MALE TO FEMALE

LEADFREE

DESCRIPTION: UTP 8P4C M/M L:400mm RED