

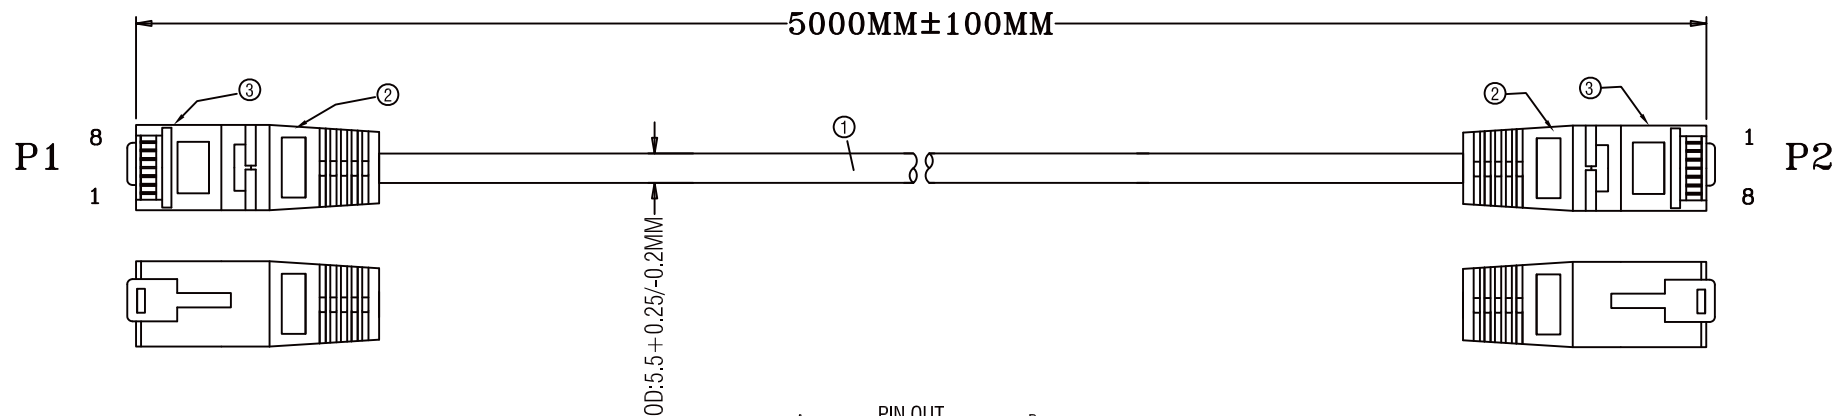


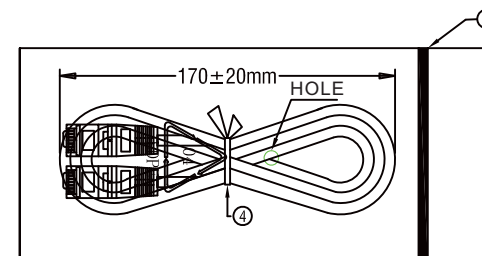

NOTES:

- 1.ELECTRICAL TEST:100% OPEN.SHORT & MISS WHRE TEST
- 2.CONDUCTOR RESISTANCE:5.0HMS MAX.
- 3.INSULATOR RESISTANCE:DC300V/0.01S500K OHM MIN.
- 4.PRINTING WORD OF CABLE: E216040 兄 AWM2835 26AWG 60° 30V TIA/EIA 568B.2 FTP CAT.5E WELLSUN

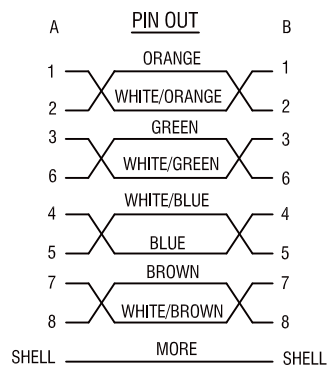

NO.	SPECIFICATION STANDARD	QTY
⑤	PACKING BAG SIZE: 90*240*0.08MM	1
④	CABLE TIE L=100*1.85-1.9MM.	1
③	RJ45 8P8C CRYSTAL HEAD+Hulled GOLD-PLATED F U"	2
②	45P PVC MOLDING,COLOR : BLUE	Kg/g
①	CAT.5E S-FTP 26AWG(7/0.16CCS)*4P+AL/ML+D OD:5.5MM+0.25/-0.2 PVC JACKET,COLOR: BLUE	1

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

RJX2-080826C5EBL-M5M-LF

SERIES

08 TO 08 WAY

26 AWG

CAT.5e

BLUE

LEADFREE
5000mm
MALE TO MALE

DESCRIPTION: CAT.5E S-FTP FTP CABLE BLUE L=5000MM