
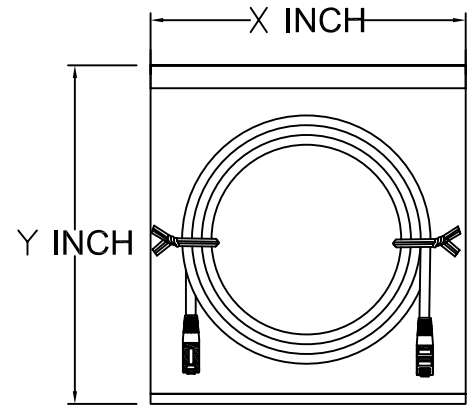


WIRING:568B

P1	COLOR	P2
1	—WH-OR—	1
2	∞∞ORANGE∞∞	2
3	—WH-GR—	3
6	∞∞GREEN∞∞	6
4	—BL—	4
5	∞∞WH-BL∞∞	5
7	—WH-BR—	7
8	∞∞BROWN∞∞	8

Drain wire To Drain wire
NOTE:∞∞TWISTED PAIR

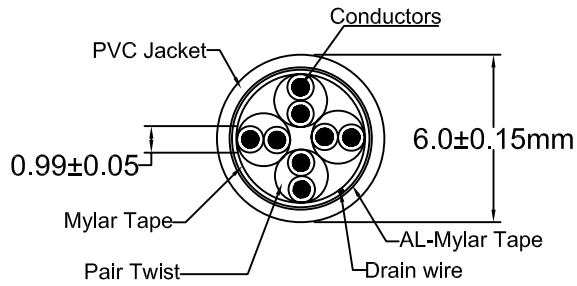

SPECIFICATION:

- CABLE:**
- 1.COMPONENT:
 - A.Size of conductors :CAT.5e STP 24AWG (0.2*7) stranded round cable.
 - B.Color coded insulation :(P.P) white/orange-orange,white/green-green,white/blue-blue,white/brown-brown.
 - C.Diameter of dielectric :0.99±0.05mm.
 - E.Plenum Shield :Mylar Tape,Drain Wire,AL-Mylar Tape.
 - D.UL style no.of single :(30v, 60°C).
 - F.Number of twist pairs :Four pairs.
 - 2.S.R: :PVC 75P Molding
 - 3.JACKET MATERIAL. :PVC
 - A.Overall diameter :Ave 6.0mm
 - B.Color. :Grey
- PLUG:**
- 1.TYPE -:Modular U.S. Shielded type 8p8c, golden plate 50u".
 - 2.MATERIAL :PC UL 94v-2

RJX2-0808GEFM-M1M5-LF
LEADFREE

RoHS Compliant



PART NO. RJX2-0808GEFM-M1M5		CHECKED BY CY		TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION: STP CABLE MOLDING L:1.5M	AREA	REVISIONS	HK	DATE
DWG NO. RJX2-0808GEFM-M1M5		DRAWING BY							
FILE NO.		PROJECTION							
UNIT / mm	SCALE 1:1								

焜倫股份有限公司