
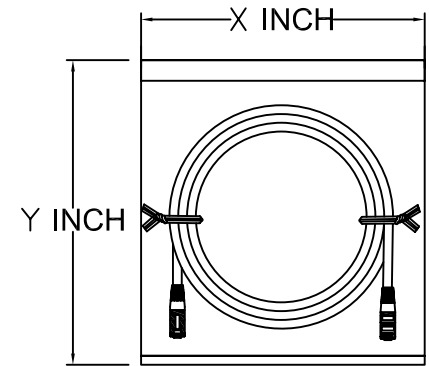


WIRING:568B  
 P1 COLOR P2  
 1 — WH-OR — 1  
 2 ∞ ORANGE ∞ 2  
 3 — WH-GR — 3  
 6 ∞ GREEN ∞ 6  
 4 — BLUE — 4  
 5 ∞ WH-BL ∞ 5  
 7 — WH-BR — 7  
 8 ∞ BROWN ∞ 8  
 Drain wire To Drain wire  
 NOTE: ∞ TWISTED PAIR

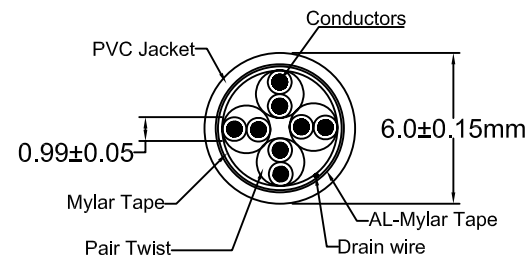

**SPECIFICATION:**

- CABLE: 1.COMPONENT:  
 A.Size of conductors :CAT.5e STP 24AWG (0.2\*7) stranded round cable.  
 B.Color coded insulation :(P.P) white/orange-orange,white/green-green,white/blue-blue,white/brown-brown.  
 C.Diameter of dielectric :0.99±0.05mm.  
 E.Plenum Shield :Mylar Tape,Drain Wire,AL-Mylar Tape.  
 D.UL style no.of single :(30v, 60°C).  
 F.Number of twist pairs :Four pairs.  
 2.S.R: :PVC 75P Molding

- 3.JACKET MATERIAL. :PVC  
 A.Overall diameter :Ave 6.0mm  
 B.Color. :GRAY

PLUG: 1.TYPE -:Modular U.S. Shielded type 8p8c,golden plate 50u".  
 2.MATERIAL :PC UL 94v-2

RJX2-0808GEFM-M2M-LF  
 LEADFREE

RoHS Compliant



PART NO. RJX2-0808GEFM-M2M		CHECKED BY CY		TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION: STP CABLE MOLDING L:1.5M	AREA	REVISIONS	HK	DATE
DWG NO. RJX2-0808GEFM-M2M		DRAWING BY							
FILE NO.		PROJECTION							
UNIT / mm	SCALE 1:1								

煜倫股份有限公司