

SPECIFICATION:

CABLE: 1. COMPONENT:

- A. Size of conductors : UTP CAT.5e 24AWG (0.20*7) round cable"ROHS".
- B. Color coded insulation : (P.P)white/orange–orange,white/green–green;
- C. Diameter of electric : 0.99 ± 0.05 mm.
- D. UL style no.of single : (30v, 60°c).
- E. Number of twist pairs : Two pairs.

2. JACKET MATERIAL. : PVC

- A. Overall diameter : Ave 4.3mm
- B. Color. : RED.

PLUG: 1. TYPE : Modular U.S F type 8p4c ,golden flash 50u".

2. MATERIAL : PC UL 94v-2

ELECTRONIC TEST:


- a. OPEN/SHORT/INTERMITTENCE: 100. %TEST
- b. INSULATION RESISTANCE: 300V DC/10M Ω .(MIN)
- c. CONDUCTIVE RESISTANCE: 2 Ω .(MAX)

RJX2-0808RV34-M20C-LF

LEADFREE

RoHS Compliant

WIRING DIAGRAM:

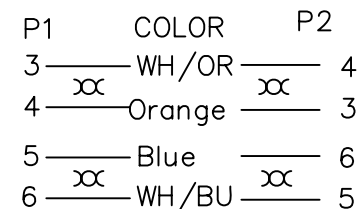

NOTE: ∞ TWISTED PAIR

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. RJX2-0808RV34-M20C

DWG NO. RJX2-0808RV34-M20C

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X \pm 0.2
.XX \pm
.XXX \pm
AWG

DESCRIPTION:

UTP 8P4C M/M L:200mm RED

AREA

REVISIONS

HK

DATE

煜倫股份有限公司