



包装示意图



PIN OUT

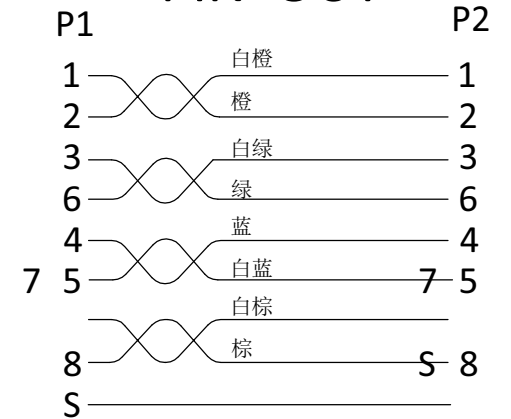

电性测试：

- (1)100% 开路 短路 断路 错位测试.
- (2)DC300V/0.1s 绝缘阻抗10MΩ(最小).
- (3)导通阻抗 5Ω(最大).

RoHS certificate 2011/65/EU + 2015/863

3	PVC 60P 黑色
2	8P8C双排两件式长头 4上4下 铜壳镀镍 三叉金片镀金3U"
1	Cat.6 S/FTP 4P*26AWG(7/0.16纯铜)单对包铝箔+地线+铝镁编织16/4/0.12 黑色PVC外被 OD=6.2±0.2mm
No.	Description

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±  
.X ± 0.30  
.XX ± 0.20  
.XXX ± 0.10  
ANG ± 2°

PPOJECTION



ORDER INFORMATION

RJX2-08RU0826C6BKM-M50C-LF

SERIES

8P TO 8P 90° U TYPE  
26 AWG  
CAT.6  
BLACK  
LEADFREE  
500mm  
MALE TO MALE  
PLUG+METAL

DESCRIPTION: 6类屏蔽成品跳线 黑色0.5m