
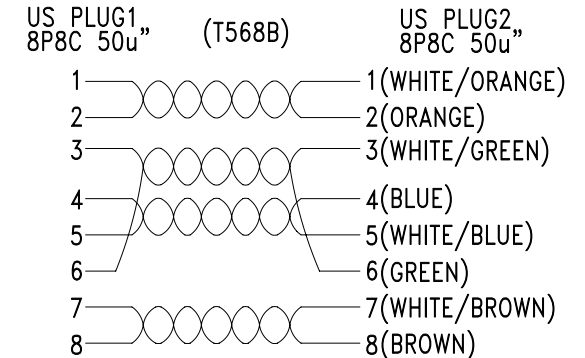


NOTES:

- 1.CABLE:CAT.6 UTP 24AWG(7/0.195)4PAIR INS:HD-PE ID:0.95±0.05
OUTER PVC JACKET,6.0±0.15,COLOUR:BLACK(#RAL9017)
- 2.CONNECTOR:RJ45 PLUG1&PLUG2 8P8C 50u"
HOUSING:MATERIAL:PC; COLOR:TRANSPARENT
CONTACT PIN:PHORSPHOR BRONZE WITH GOLD PLATED 50u"
- 3.GROMMET:MATERIAL:PE+EVA,COLOUR:BLACK(#RAL9017)
- 4.ELECTRICAL TEST:
 - 1).100%OPEN&SHORT CONTINUITY
 - 2).100%TESTING FOR COMPLIANCE
 - 3).INSULATION RESISTANCE:1M OHMS
- 5.JACKET MARKING:
E148114-D (UL) CM 75°C 4PR 24AWG UTP CAT.6 PATCH CABLE
CM ETL VERIFIED TO TIA/EIA-568-B.2-1+BATCH NUMBER
OR:E329097 (UL) CM 75°C 4PR 24AWG PVC UTP ETL VERIFIED
TO TIA-568-C.2 CAT.6 PATCH CABLE+BATCH NUMBER

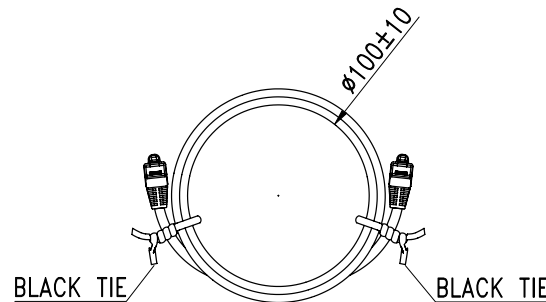

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 1.00
.X ± 0.50
.XX ± 0.20
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

RJX2-08RU08RU24C6-M60C-LF

SERIES

LEADFREE

600mm
MALE TO MALE

CAT.6
24 AWG
8P TO 8P 90° U TYPE

DESCRIPTION: P+P UTP CAT6(90°)