


RJ45
US PLUG

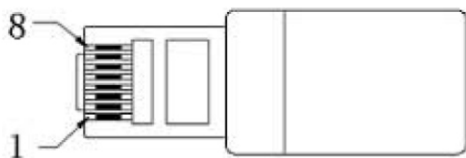

US PLUG	WIRING COLOR	US JACK
1	BLU	1
2	ORG	2
3	BLK	3
4	RED	4
5	GRN	5
6	YEL	6
7	BRN	7
8	WHT	8

SPECIFICATIONS:

- | | |
|----------------|--|
| 1. COVER: | A. PC 94V-2.
B. ABS 94V-2.
C. COLOR : IVORY . |
| 2. WIRE: | A. UL 1061 26AWG.
B. STANDARD 7/0. 16. |
| 3. CONDUCTORS: | A. MATERIAL : BRASS.
B. MATL 0. 45mm DIAMETER.
C. NICKEL THICKNESS: 100-135.
D. GOLD THICKNESS 2. 3 —3U". |

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

RJX2-ES-0808-LF

SERIES | | LEADFREE
8P8C
SLIM
MALE TO FEMALE

DESCRIPTION: