

Performance:

Meets C6 EIA/TIA 568B Standard.

Materials:

- Body : Fireproof ABS UL-94V0
- Jack : 8P8C 50 micro inches gold plated
- PCB : FR-4 / UL-94V0
- IDC Body : Fireproof ABS UL-94V0
- IDC Pin : Bronze & Tinned

IDC Description : For 22-26 AWG.
For 110 or Krone punch-down Tool

Electrical Specifications:

- Insulation Resistance : 500M ohms (min.)
- Contact Resistance : 20m ohms (max.)
- Current Rating : 1.5 Amps .
- DC Resistance : 0.1 ohms (max.)
- Withstanding Voltage : 1000 VAC RMS @ 60Hz / 1 min.


Mechanical Specifications:

- IDC Punch Down Cycle : Over 250 Cycles (min.)
- Jack Insertion Cycle : Over 2000 Cycles (min.)

Operation Temperature : -40 °C ~ +70 °C

RoHS Compliant

TOLERANCES ARE

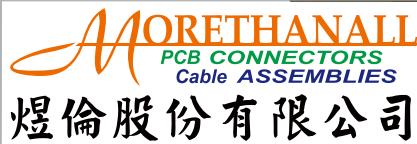

DRAWING BY CY		X. ± 1.00
CHECKED BY GENIUS		.X ± 0.20
UNIT / mm	SCALE 1 : 1	.XX ± 0.15
DATE		.XXX ±
		ANG ±



ORDER INFORMATION

RJX2-F11C6PE86FM-0808-LF
 SERIES | | | | | LEADFREE
 | | | | | 8P8C
 | | | | | JACK/ METAL
 | | | | | LONG 86.0mm
 FEMALE IDC | | | | | PANEL
 JACK X 1 | | | | | CAT.6

www.morethanall.com

SIZE A4 PPROJECTION

DESCRIPTION: C6 MODULE FACEPLATE STP 50u