
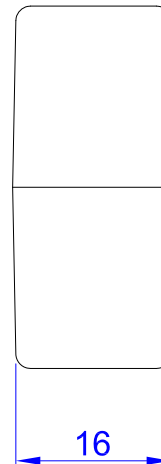
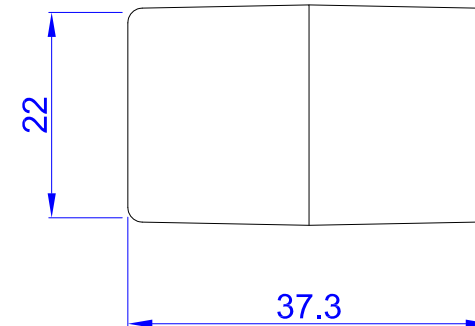


Features :

- T-568A/B Dual wiring
- RJ45 complies with FCC part 68 standard
- 110/Krone dual IDC connector compatible
- Provides termination for 22~26 AWG wire
- Jack insertion life >750 mating cycles
- IDC insertion life >250 mating cycles
- Operating temperature : -40 °C ~ +60 °C

Electrical :

- Contact resistance : 20m ohm
- DC Current rating : 1.5Amps
- DC resistance : Max.0.1 ohm
- Insulation Resistance : 500m ohm
- Dielectric withstanding voltage : 1000V



1	_____	1
2	_____	2
3	_____	3
4	_____	4
5	_____	5
6	_____	6

WIRING

MATERIAL	
CATEGORY	☐ CAT.5E ☐ CAT.6 ☒ CAT.3 ☐ OTHER _____
HOUSING	ABS UL94V-2
CONTACT	0.46 mm DIAMETER PHOSPHOR BRONZE GOLD PLATED OVER NICKEL
GOLD-PLATING	☐ 0.0762um/3u inch ☒ 0.15um/6u inch ☐ 0.38um/15u inch ☐ 0.76um/30u inch ☐ 1.27um/50u inch
COLOR	☐ WHITE ☐ BLACK ☐ GREEN ☐ BLUE ☐ YELLOW ☐ RED ☐ ORANGE ☒ IVORY ☐ OTHER _____
TYPE OF PRODUCT	☒ UNSHIELD ☐ SHIELD : 0.25mm THICKNESS COPPER ALLOY WITH NICKLE PLATED.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

RJX2-FS-0606-LF

SERIES | LEADFREE
6P6C

FEMALE TO FEMALE 180°

DESCRIPTION: