


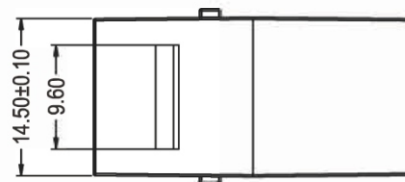
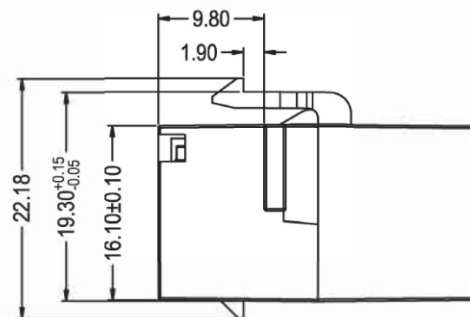


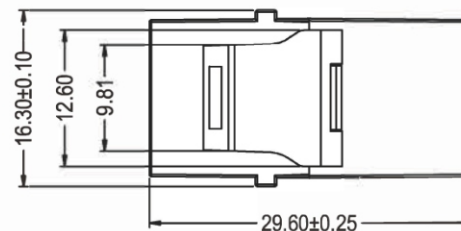

ELECTRICAL:

Current rating : 1.5A
Dielectric withstanding voltage : 1000V/AC 60Hz
Insulation resistance : 500 MΩ MIN.
Contact resistance : 20 mΩ MAX.

MECHANICAL:

Durability:RJ45 With 750 Mating Cycles
and RJ11 With 200 Mating Cycles
Operating Temperature:-40°C to +85°C
Storage Temperature:-40°C to +85°C

MATERIAL:

Front cover: ABS+PC V0
RJ45 Jack Contact:Phosphor bronze,50U" Gold Plating

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

RJX2-FSC5EBK29PN-0808-LF
SERIES PANEL 8P8C LEADFREE
FEMALE TO FEMALE 180° BLACK LONG 29.6mm
CAT.5E

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.25
.XXX ± 0.20
ANG ±

DESCRIPTION: