

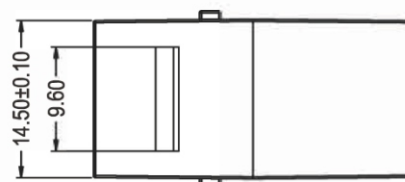
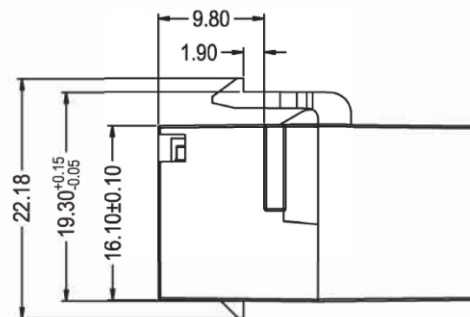


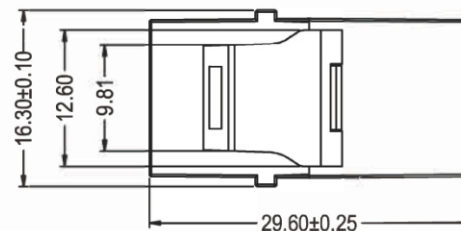

ELECTRICAL:

Current rating : 1.5A
Dielectric withstanding voltage : 1000V/AC 60Hz
Insulation resistance : 500 MΩ MIN.
Contact resistance : 20 mΩ MAX.

MECHANICAL:

Durability:RJ45 With 750 Mating Cycles
and RJ11 With 200 Mating Cycles
Operating Temperature:-40°C to +85°C
Storage Temperature:-40°C to +85°C

MATERIAL:

Front cover: ABS+PC V0
RJ45 Jack Contact:Phosphor bronze,50U" Gold Plating

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.25
.XXX ± 0.20
ANG ±



照片框

ORDER INFORMATION

RJX2-FSC5EBK29PQ2K-0808-LF

SERIES
FEMALE TO FEMALE 180°
CAT.5E
BLACK
8P8C
TWO HOLES BLACK
PANEL SQUARE
LONG 29.6mm
LEADFREE

DESCRIPTION:

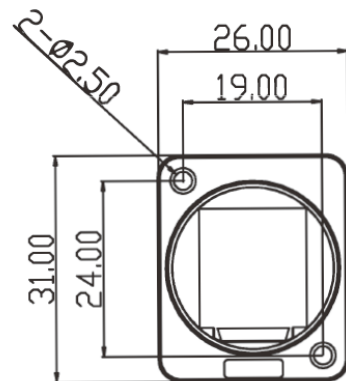

Specifcation :

(1)Material:

.PC V0 BK

(2)Else :

.Working temperature:-10~60°C

.Storage temperature:-40~70°C

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.25
.XXX ± 0.20
ANG ±

PPOJECTION

ORDER INFORMATION

RJX2-FSC5EBK29PQ2K-0808-LF

SERIES

FEMALE TO FEMALE 180°
CAT.5E
BLACK
8P8C
TWO HOLES BLACK
PANEL SQUARE
LONG 29.6mm
LEADFREE

DESCRIPTION: