
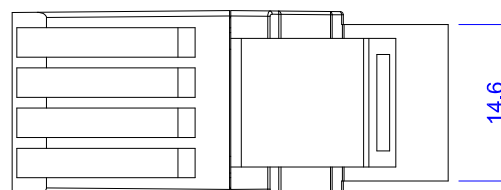

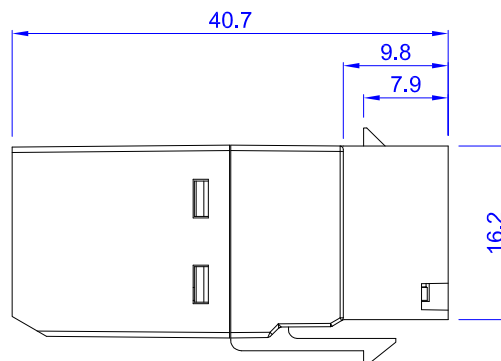
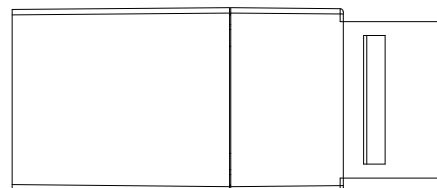


Features :

- RJ45 complies with FCC part 68 standard
- Jack insertion life >750 mating cycles
- Operating temperature : -40 °C ~ +60 °C

Electrical :

- Contact resistance : 20m ohm
- DC Current rating : 1.5Amps
- DC resistance : Max.0.1 ohm
- Insulation Resistance : 500m ohm
- Dielectric withstanding voltage : 1000V



MATERIAL	
CATEGORY	☐ CAT.5E ☒ CAT.6 ☐ CAT.3 ☐ OTHER _____
HOUSING	ABS UL94V-0
CONTACT	0.35 mm DIAMETER PHOSPHOR BRONZE GOLD PLATED OVER NICKEL
GOLD-PLATING	☐ 0.0762um/3u inch ☐ 0.15um/6u inch ☐ 0.38um/15u inch ☐ 0.76um/30u inch ☒ 1.27um/50u inch
COLOR	☒ WHITE ☐ BLACK ☐ GREEN ☐ BLUE ☐ YELLOW ☐ RED ☐ ORANGE ☐ IVORY ☐ OTHER _____
TYPE OF PRODUCT	☒ UNSHIELD ☐ SHIELD : 0.25mm THICKNESS COPPER ALLOY WITH NICKLE PLATED.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

RJX2-FSC6PE40WH-0808-LF

SERIES

FEMALE TO FEMALE

8P8C

WHITE


LONG 40.7mm

PANEL+EAR





CAT.6

LEADFREE



DESCRIPTION:

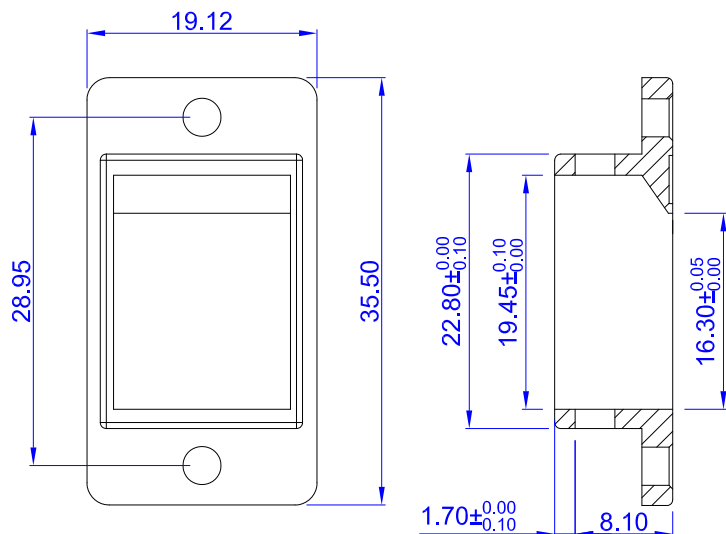

SECTION A-A

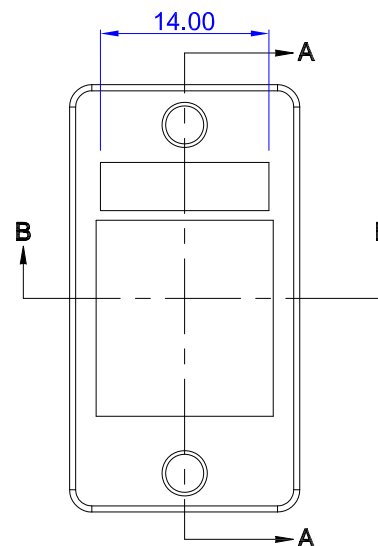

SECTION B-B

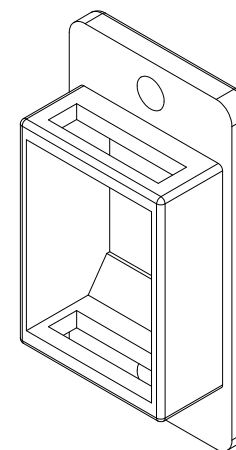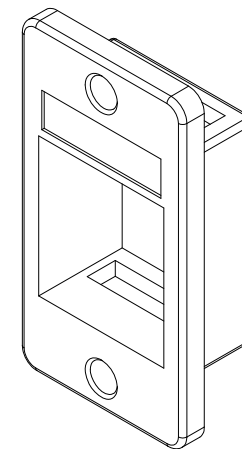

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

RJX2-FSC6PE40WH-0808-LF

SERIES

FEMALE TO FEMALE

LEADFREE

8P8C

WHITE

LONG 40.7mm

PANEL+EAR

CAT.6

DESCRIPTION: