

SCALE 1/1


Specification :

Material :

1. RJ45 Jack Housing : ABS+PC, UL 94V-0.
2. RJ45 Jack Bracket Set : PC, UL 94V-2, Transparent color.
3. RJ45 Jack Contact :
 - 3-1. Material : Phosphor Bronze with Nickel plated.
 - 3-2. Finish : 50 micro-inch Gold plated on Plug contact area.
4. PCB : FR4, UL 94V-0.

Performance :

- a. Insertion force : 20N max. (IEC 60603-7-4).
- b. Retention strength : 7.7 kg between Jack and Plug.
- c. Operating temperature : -10°C to 60°C. (ISO/IEC 11801, ANSI/TIA/EIA 568 B.2)
- d. Life(mating cycles) : 750 cycles min. (ISO/IEC 11801, IEC 60603-7-4).
- e. The Cat.6 transmission performance is in compliance with the ANSI/TIA/EIA 568 B.2-1 standard.

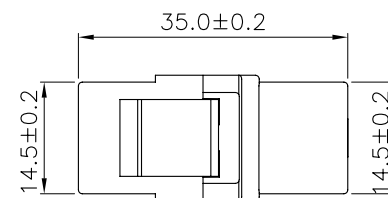

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.10
.XX ± 0.05
.XXX ± 0.005
ANG ±

PJECTION

照片框

ORDER INFORMATION

RJX2-FSC6PN35WH-0808-LF

SERIES | | | | LEADFREE

FEMALE TO FEMALE | | | | PANEL
CAT.6 | | | | 8P8C
LONG 35.0mm

DESCRIPTION: CAT.6 UNSHIELDED KEYSTONE JACK

www.morethanall.com