

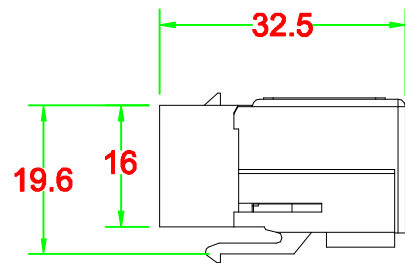



Dimensions:



Performance:

Meets Cat.5e EIA/TIA 568B.1 Standard.

Materials:

Plastic Body : Fireproof ABS UL-94V0

Plastic Cover: Fireproof ABS UL-94V0

RJ-45 Jack : 8P8C 50 micro inches gold plated

PCB : FR-4 / 1.0mm UL-94V0

Electrical Specifications:

Insulation Resistance : 500M ohms (min.)

Contact Resistance : 20m ohms (max.)

Current Rating : 1.5 Amps .

DC Resistance : 0.1 ohm (max.)

Withstanding Voltage : 1000 VAC RMS @ 60Hz / 1 min.

Mechanical Specifications:

RJ-45 Jack Insertion Cycle : Over 2000 Cycles (min.)

Operation Temperature : -40 ~ +70 degree / C

RJX2-FSCEPB-0808-LF

LEADFREE

RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. RJX2-FSCEPB-0808

DWG NO. RJX2-FSCEPB-0808

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2

.XX ±

.XXX ±

AWG

DESCRIPTION: **Cat.5e Inline Coupler (UTP)**

AREA

REVISIONS

HK

DATE

焯倫股份有限公司