

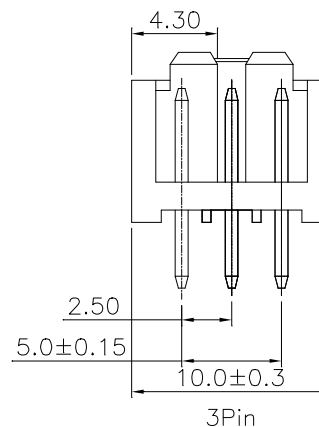
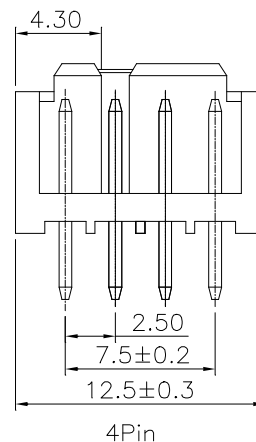
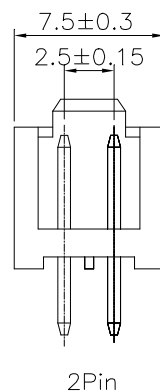
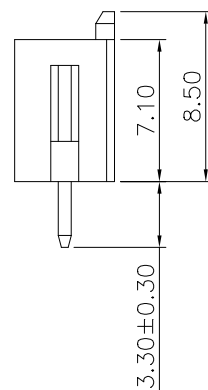
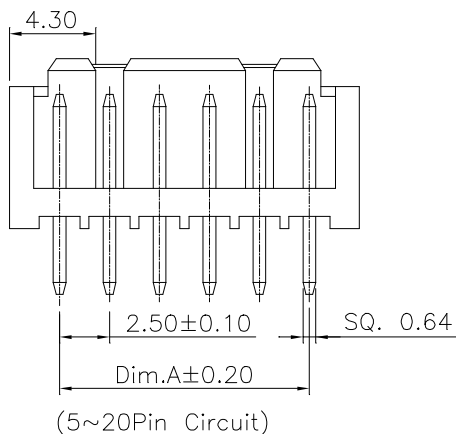
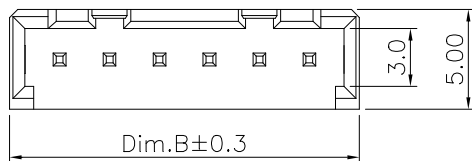


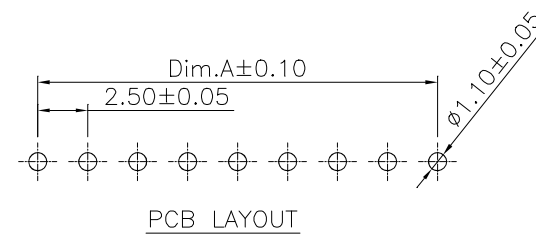

Specifications:
 Current Rating:3.0A AC,DC
 Voltage Rating:250V AC,DC
 Contact Resistance:20mohm Max
 Insulation Resistance:1000Mohm Min.
 Withstanding Voltage:1000V AC/minute
 Operating Temperature Range:-40°C~+85°C
 Material And Finish:
 Insulator:High Temp. Plastic(Nylon 66 UL94V-0)
 Insulator Color:Black
 Contact:Brass
 Plating:Tin Plated



△ Dimension:

POS.	Dim.A	Dim.B	POS.	Dim.A	Dim.B	POS.	Dim.A	Dim.B
2	2.50	7.50	9	20.00	25.00	16	37.50	42.50
3	5.00	10.00	10	22.50	27.50			
4	7.50	12.50	11	25.00	30.00			
5	10.00	15.00	12	27.50	32.50			
6	12.50	17.50	13	30.00	35.00			
7	15.00	20.00	14	32.50	37.50			
8	17.50	22.50	15	35.00	40.00			

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ± 0.20
 .XX ± 0.15
 .XXX ±
 ANG ±



ORDER INFORMATION

RLM-D-xx-LF
 SERIES | LEADFREE
 02~16 WAY
 DIP 180°

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: 2.50mm Wire To Board Wafer Straight Type