

SPECIFICATION

CURRENT RATING: 3A AC,DC

VOLTAGE RATING: 250V AC,DC

TEMPERATURE RANGE: -25°C TO +85°C

(INCLUDING TEMPERATURE RISE)

CONTACT RESISTANCE: INITIAL VALUE/10M OHM MAX.

AFTER ENVIRONMENTAL TESTING/20M OHM MAX.


INSULATION RESISTANCE: 1,000M OHM MIN.

WITHSTANDING VOLTAGE: 1,000V AC/MINUTE

CONTACT: PHOSPHOR BRONZE, TIN-PLATED

POST: COPPER-UNDERCOATED, TIN/LEAD PLATED

APPLICABLE WIRE:AWG #28 TO #22

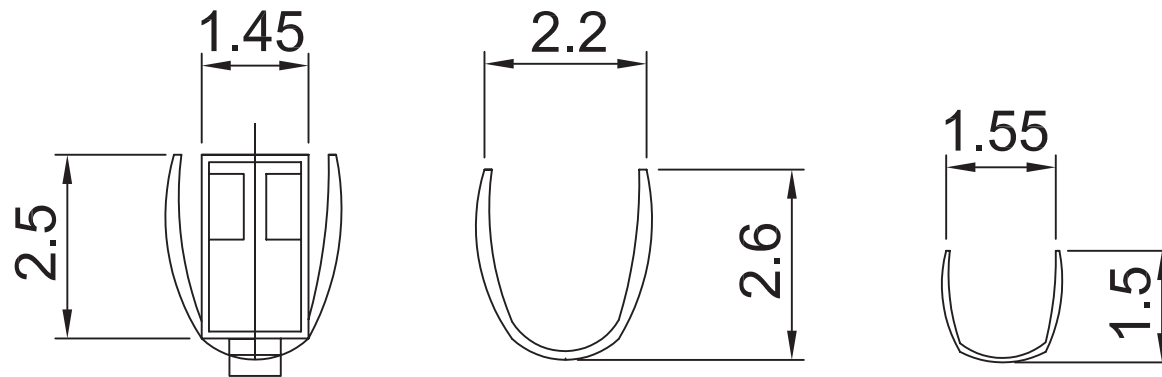

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm


SCALE 1:1

DATE


SIZE A4

PROJECTION

X.±
.X±
.XX±
.XXX±
ANG±



ORDER INFORMATION

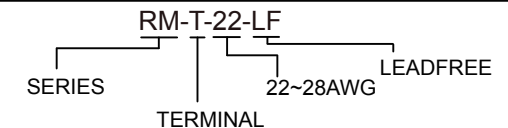

DESCRIPTION: