



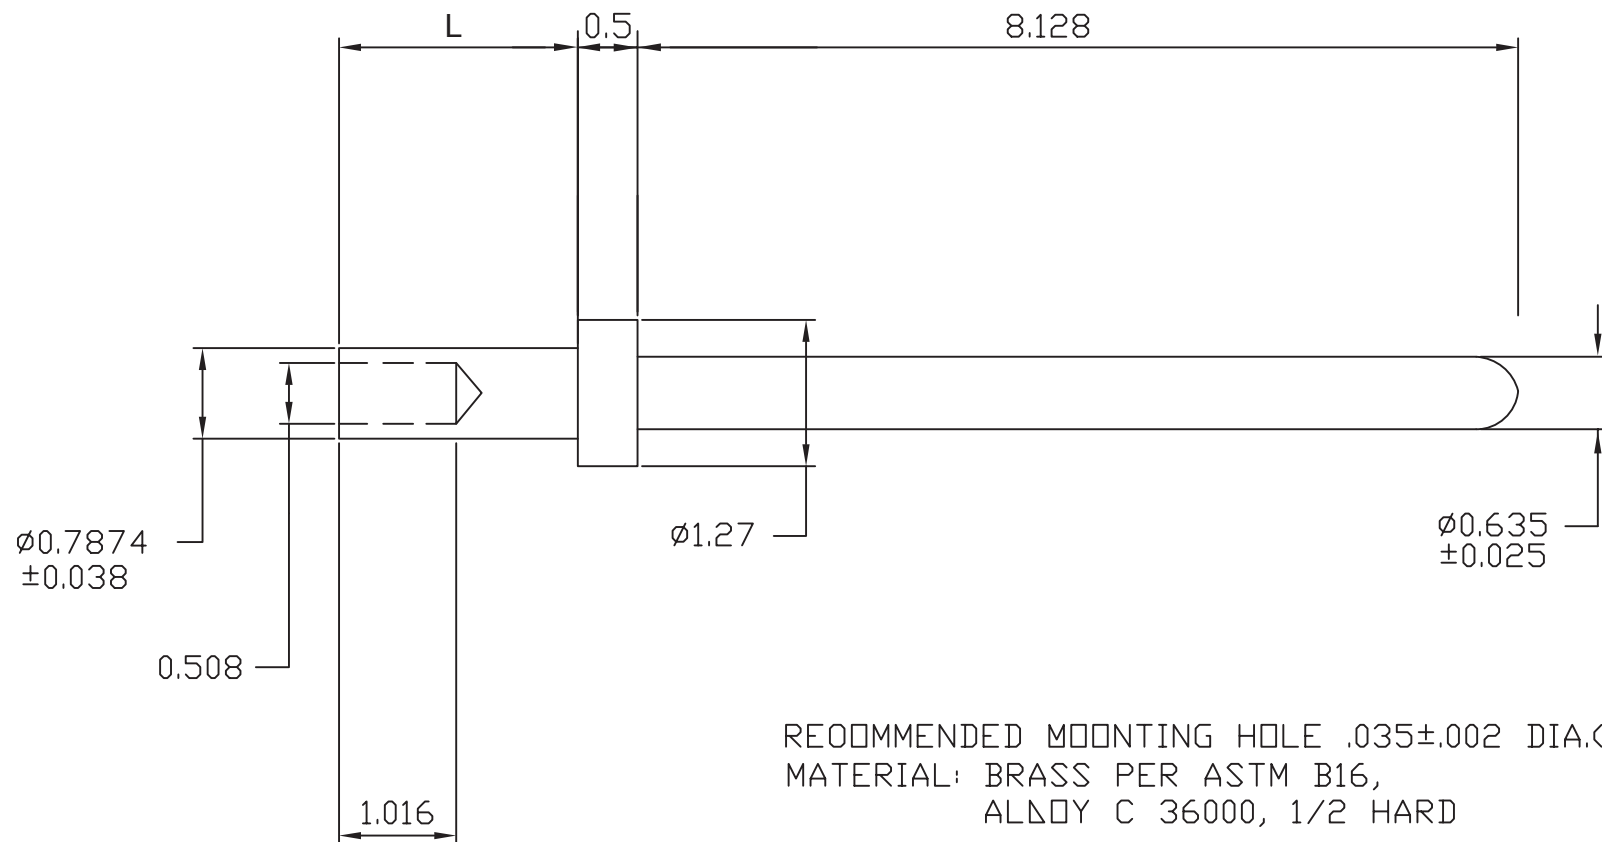

RECOMMENDED MOUNTING HOLE .035±.002 DIA.(#65 DRILL)
 MATERIAL: BRASS PER ASTM B16,
 ALLOY C 36000, 1/2 HARD
 FINISH: .000010"MIN. GOLD PER ASTM B488
 TYPE II, CODE C, OVER .000050"MIN. NICKEL
 PER AMS-QQ-N-290, CLASS 1

ACTUAL SIZE



PART NUMBER:

RP-D13G-0635

RP-D20G-0635

L:

.13

.20

BOARD THICKNESS:

1/32

1/16

RoHS Compliant

TOLERANCES ARE

X.±
 .X±
 .XX±
 .XXX±
 ANG ±

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

RP-DxxG-0635-LF
 SERIES | | | LEADFREE
 | | | 0.635Ø
 | | | GOLD
 13:L LONG 1.3mm
 20:L LONG 2.0mm
 DIP 180°

DESCRIPTION:

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com