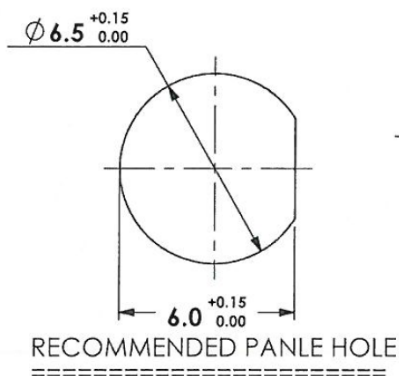
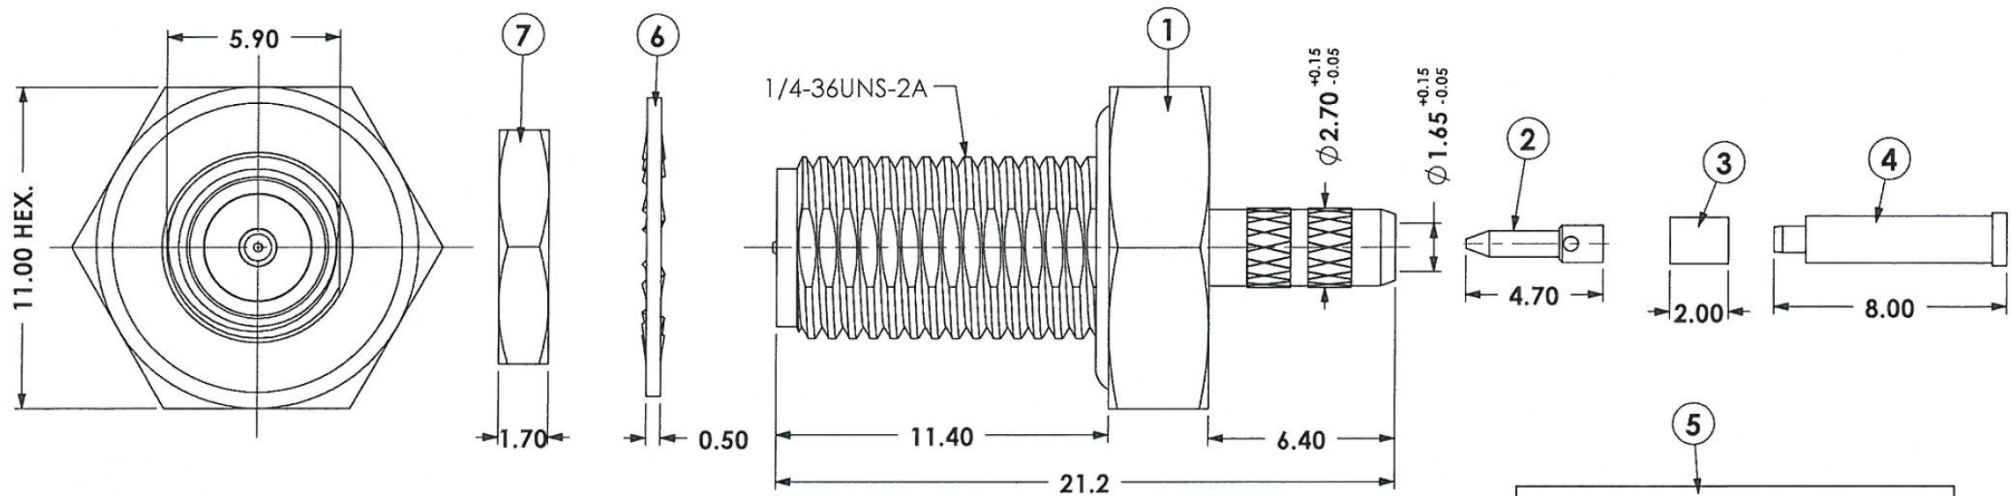


#### ELECTRICAL PERFORMANCE :

1. Impedance : 50 ohms
2. Frequency Range : 0~6.0 GHz
3. Working Voltage : AC60 V Maximum
4. Dielectric Withstanding Voltage : AC200V Minimum
5. Insulator Resistance : 500 Megohms Minimum

| 7     | NUT             | BRASS           | GOLD      |
|-------|-----------------|-----------------|-----------|
| 6     | LOCK WASHER     | SK5             | GOLD      |
| 5     | HEAT SHINK TUBE | PE              | BLACK     |
| 4     | BUSHING         | BRASS           | GOLD      |
| 3     | REAR INSULATOR  | TEFLON          | NATURE    |
| 2     | CONTACT         | BRASS           | GOLD 30u" |
| 1     | O-RINR          | SILICONE RUBBER | RED       |
|       | CONTACT         | BRASS           | GOLD 30u" |
|       | INSULATOR       | TEFLON          | NATURE    |
|       | BODY            | BRASS           | GOLD      |
| ITEMS | DESCRIPTION     | MATERIAL        | FINISHED  |

#### RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±  
.X ± 0.50  
.XX ± 0.25  
.XXX ±  
ANG ±

照片框

#### ORDER INFORMATION

RPSMA-JCPBONW-113-LF

SERIES JACK CRIMP PANEL BACK  
LEADFREE  
Rg174  
WASHER  
NUT  
RING  
BACK

DESCRIPTION: RP-SMA ST. JACK CRIMP TYPE FOR Ø1.13 CABLE  
WITH O-RING FOR WATER PROOF