
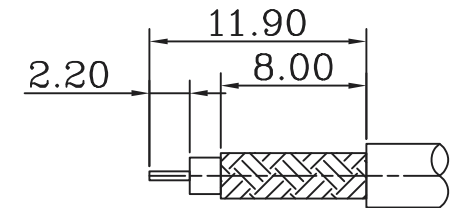


- 1. CRIMPED FERRULE HEX CRIMP SIZE .213"
- 2. CONTACT PIN TO SOLDER

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)  
GOLD PL. 3 MICROINCH MINIMUM

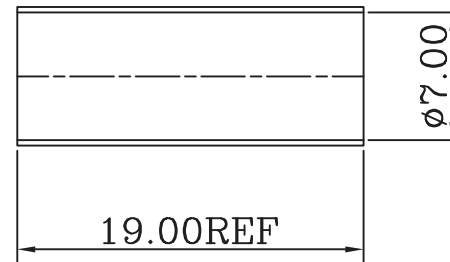

RECOMMENDED  
CABLE STRIPPING DIM'S

8	SUMMER TUBE	-----	1	BLACK
7	FERRULE	BRASS	1	GOLD PLATED
6	CONTACT PIN	Be.Cu	1	GOLD PLATED
5	RETAINER RING	Be.Cu	1	NONE
4	GASKET	SILICON	1	RED
3	INSULATOR	TEFLON	1	NATURAL
2	BODY	BRASS	1	GOLD PLATED
1	SHELL	BRASS	1	GOLD PLATED
ITEM	DESCRIPTION	MATERIAL	Q'TY	FINISHED

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

P PROJECTION

0.5-15 = ±0.15  
15-30 = ±0.30  
30-120 = ±0.60  
>120 = ±1.00  
ANGLES  
±5°

照片框

ORDER INFORMATION

RPSMA-PC-58-LF

SERIES

LEADFREE

RG58U

CRIMP

MALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: RP SMA MALE CRIMP TYPE FOR RG58U, 50 OHM