


Note:

- 1. Material: Insulator: PA66+30% G/F UL94V-0
Terminal: Copper alloy



Normal type without post

12	62.0(2.441)	55.0(2.165)	60.2(2.370)
11	57.0(2.244)	50.0(1.969)	55.2(2.173)
10	52.0(2.047)	45.0(1.712)	50.2(1.975)
9	47.0(1.850)	40.0(1.575)	45.2(1.780)
8	42.0(1.654)	35.0(1.378)	40.2(1.583)
7	37.0(1.457)	30.0(1.181)	35.2(1.386)
6	32.0(1.260)	25.0(.984)	30.2(1.189)
5	27.0(1.063)	20.0(.787)	25.2(.992)
4	22.0(.886)	15.0(.591)	20.2(.795)
3	17.0(.669)	10.0(.394)	15.2(.598)
2	12.0(.472)	5.0(.197)	10.2(.402)
CIRCUITS	DIM.A	DIM.B	DIM.C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 1°

PJECTION

照片框

ORDER INFORMATION

RST50-PRAxX-xx0xx-LF

SERIES LEADFREE
KEY LOCK TYPE
02:02WAY
12:12WAY
NON BUMP
7:7.85
9:9.05

煜倫股份有限公司

www.morethanall.com

DESCRIPTION:

TYPE	0A	0B	0C	0D	0E	0F	0G	0H	0I	0J	0K	0L	0M	0N
KEY/LOCK 2-way														

0P	0Q	0R	0S	0T	0U	0X	0Z	09	10	11	48	80	86

TYPE	0A	0B	0C	0D	0E	0F	0G	0H	0I	0K	0L
KEY/LOCK 3-way											

0M	0N	0Q	0W	01	02	03	05	08	10	11

12	13	1A	2N	2P	31	32	38	39	40	44

53	65	80	81	98

TYPE	0A	0B	0C	0D	0E	0F	0G	0H	0I
KEY/LOCK 4-way									

0J	0K	0L	0M	0W	01	02	03	04

05	06	12	17	19	37	43	63	65

80	81	82	84	86	PA	PB



RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 1°

PJECTION

ORDER INFORMATION

RST50-PRAXyX-xx0xx-LF

SERIES I T T T T LEADFREE
MALE KEY LOCK TYPE
DIP 90° 02:02WAY
NORMAL 12:12WAY
L:L TYPE NON BUMP
R:R TYPE 7:7.85
9:9.05

DESCRIPTION:

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

TYPE	0A	0B	0C	0D	0E	0F	0G	0L
KEY/LOCK 5-way								
	01	02	03	04	05	06	07	08
	09	11	12	13	14	17	18	20
	21	22	23	24	25	26	27	28
	29	30	31	32	33	34	35	36
	43	45	49	50	51	64	69	73
	80	81	82	83	84	85	86	87
	88	PB						

TYPE	0A	0B	0C	0D	0E	01
KEY/LOCK 6-way						
	04	06	14	15	21	29
	30	50	51	71	73	80
	81					

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 1°

PJECTION

照片框

ORDER INFORMATION

RST50-PRAxYX-xx0xx-LF

SERIES LEADFREE
MALE KEY LOCK TYPE
DIP 90° 02:02WAY
NORMAL 12:12WAY
L:L TYPE NON BUMP
R:R TYPE 7:7.85
9:9.05

煜倫股份有限公司

www.morethanall.com

DESCRIPTION:

TYPE	0A	0B	1B	0C	0D	0E
KEY/LOCK 7-way						
	03	04	14	22	23	27
	30	31	32	34	35	38
	40	41	42	43	45	48
	51	59	69	76	80	81
	83					

TYPE	0A	0C	0D	0E	0F	0B
KEY/LOCK 9-way						
	10	16	21	30	33	41
	44	45	46	48	49	57
	58	62	63	77	80	81

TYPE	0A	0B	0C	0D	0B
KEY/LOCK 9-way					
	31	42	43	48	49
	52	53	57	58	
	80	81			

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 1°

PJECTION

照片框

ORDER INFORMATION

RST50-PRAxYX-xx0xx-LF

SERIES LEADFREE
MALE KEY LOCK TYPE
DIP 90° 02:02WAY
NORMAL 12:12WAY
L:L TYPE NON BUMP
R:R TYPE 7:7.85
9:9.05

煜倫股份有限公司

www.morethanall.com

DESCRIPTION:

TYPE	0A	01	02	30
KEY/LOCK 10-way				
	36	46	50	51
	52	64	70	72
	74	75	76	80

TYPE	0A	0B	0C	01
KEY/LOCK 11-way				
	12	13	33	55
	60	64	80	

TYPE	27	30	59	65
KEY/LOCK 12-way				
	80			

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 1°

PJECTION

照片框




ORDER INFORMATION

RST50-PRAxYX-xx0xx-LF

SERIES


DESCRIPTION:

www.morethanall.com

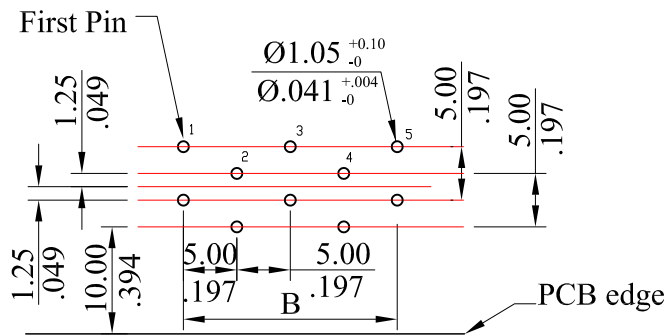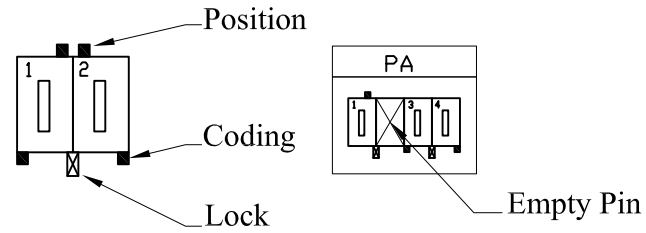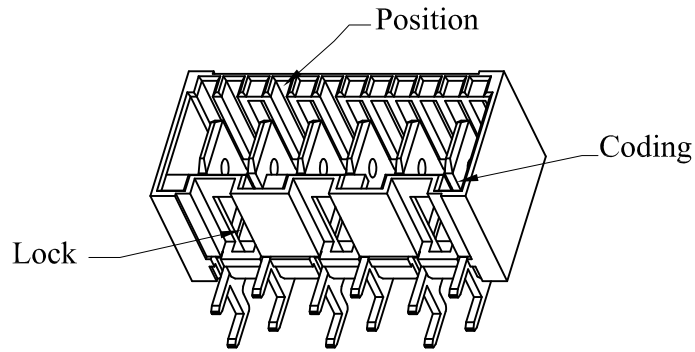

PCB layout for normal

R Type PCB layout for normal

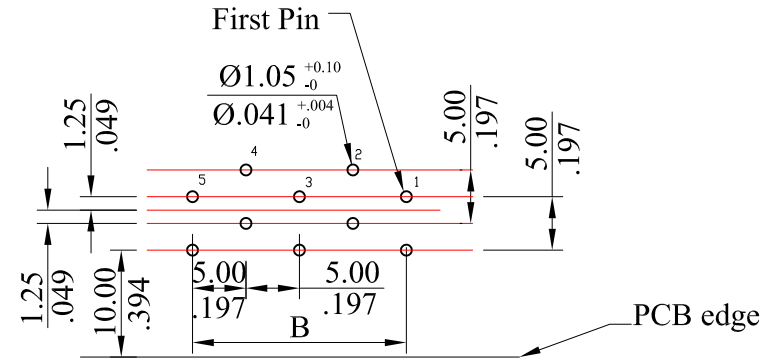

PCB layout for reverse

L Type PCB special layout for normal

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20

DATE

.XXX ± 0.10

ANG ± 1°

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

RST50-PRAxX-xx0xx-LF

SERIES I I I I I LEADFREE
MALE KEY LOCK TYPE
DIP 90° 02:02WAY
NORMAL 12:12WAY
L:L TYPE NON BUMP
R:R TYPE 7:7.85
9:9.05

DESCRIPTION:

煜倫股份有限公司

www.morethanall.com