
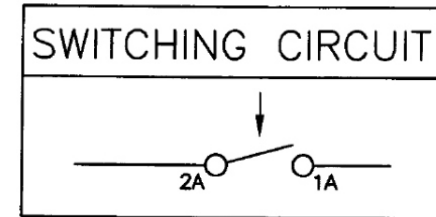


Rating: 10A 250V AC 1/3HP TV-5
 Approvals: UL/CSA

Rating: 8A/80A250V AC T85
 10(4)A250V AC T85

Approvals: VDE/DEMKO/NEMKO/SEMKO/FIMKO/CQC/KTL
 DIELECTRIC WITHSTAND VOLTAGE: 1000VAC 1 MINUTE
 INSULATION RESISTANCE: 100MΩ(MIN)



PANEL CUTOUT DIMENSION TABLE

X(PANEL THICKNESS)	Y(CUTOUT DIMENSION)	Z(CUTOUT DIMENSION)
0.75~1.25mm	19.2 \pm ₀ ^{0.2} mm	12.9 \pm ₀ ^{0.15} mm
1.25~2mm	19.4 \pm ₀ ^{0.2} mm	12.9 \pm ₀ ^{0.15} mm

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

P PROJECTION

照片框

ORDER INFORMATION

RSW-Q4-0402-LF

SERIES | LEADFREE
 4P2C
 TAB 4.8mm

DESCRIPTION: