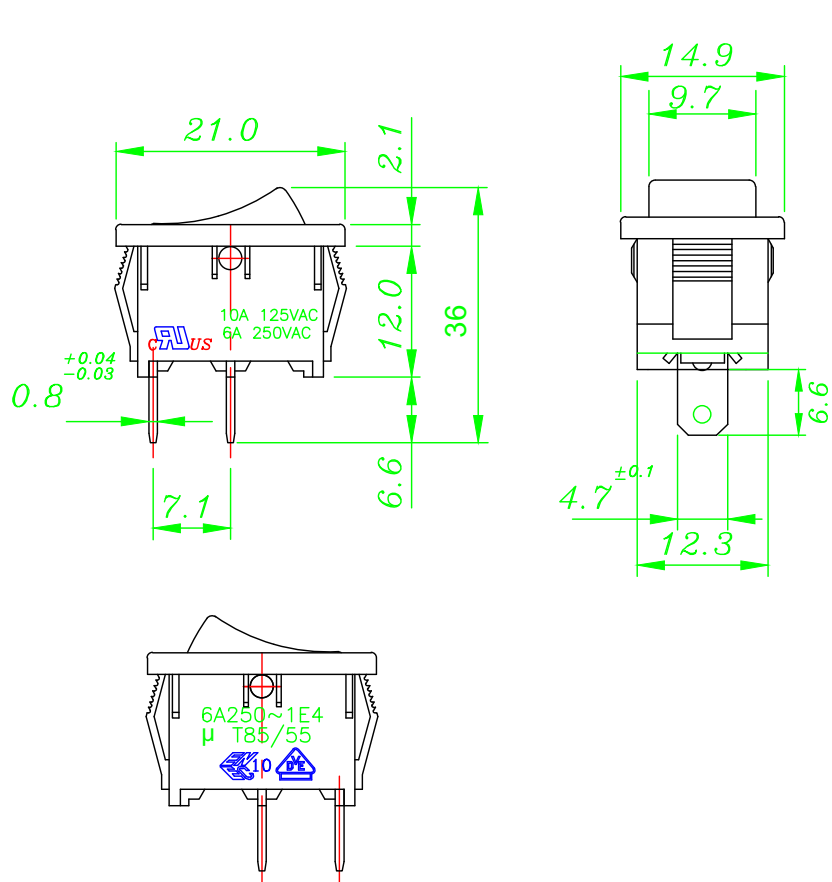


W	PANEL THICK
19.2	0.75-1.25
19.4	1.25-2.0
19.8	2.0-3.0

規格 SPECIFICATIONS:

- 迴路
CIRCUIT
- 定格
RATING

SPST : ON - OFF

K : 6A 125VAC/3A 250VAC : CRAUS

H : 10A 125VAC/6A 250VAC :



- 接觸電阻
CONTACT RESISTANCE.

30m Ω Max .

- 絕緣電阻
INSULATION RESISTANCE.

DC 500V 100M Ω Min .

- 耐電壓
WITHSTAND VOLTAGE.

AC 2000V 1 Minute .

- 作動力
OPERATION FORCE

800 $\pm$ 300 g .

- 電氣壽命
ELECTRICAL LIFE

10,000 Cycles At Full Load .

- 使用溫度範圍
OPERATING TEMPERATURE RANGE.

-25°C~+85°C .

- 焊接
SOLDERING

280°C FOR 3 Sec .

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

RSW-Q4PA-0302-LF

SERIES | LEADFREE
3P2C
PANEL FRONT
TAB 4.8mm

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

DESCRIPTION: