
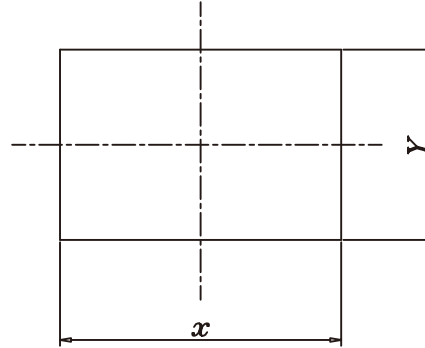


MOUNTING HOLE


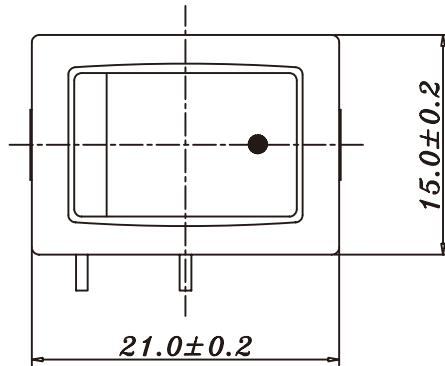


SPECIFICATION

CONTACT RATING :5A250VAC 10A125VAC (VDE R_{A})
 10A 250V/125V (C_{S})
 6(1)A250V ~ uT85/55 (D N S FI)
 5A/2X250V ~ (CQC)
 INITIAL CONTACT RESISTANCE:50Milliohms Max.
 INSULATION RESISTANCE :500 Megohms Min 500VDC.
 WITHSTAND VOLTAGE :1,000 VAC-1 Minute.
 LIFE EXPECTANCY :10,000 Cycles.
 OPERATING FORCE :400±200 gf.

Safety Certificate	FILE NO:
R_{A}	E105856
C_{S}	40027238
S	LR112904-6
FI	CQC03002004731

Safety Certificate	FILE NO:
D	313271-01
S	502273
N	P05203712
FI	21533

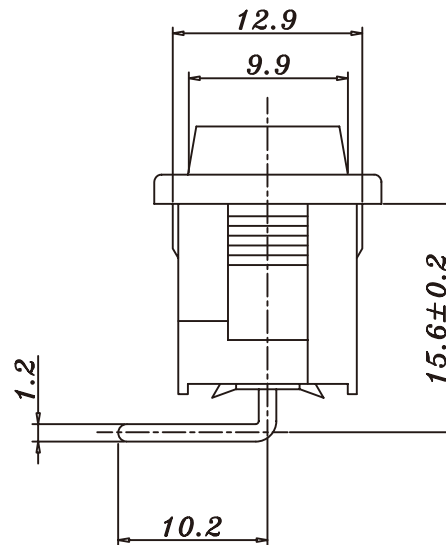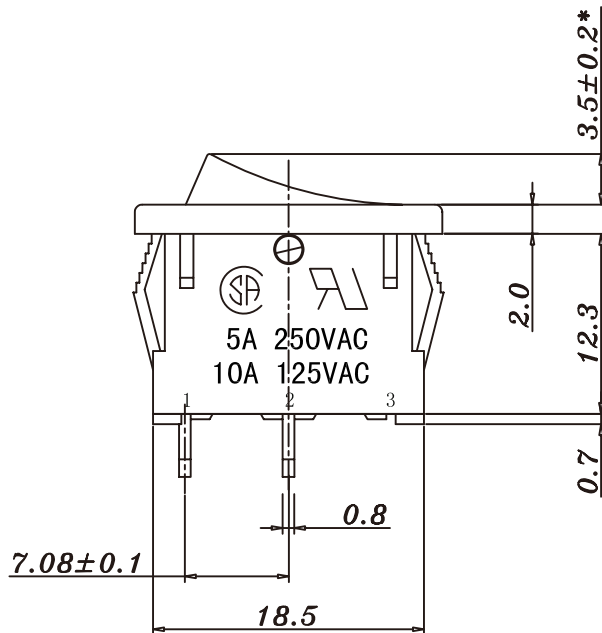

Panel Thickness	Dim. X	Dim. Y
0.75~1.25	19.2/19.1	13.0/12.9
1.25~2.0	19.4/19.3	13.0/12.9
2.0~3.0	19.8/19.7	13.0/12.9

主要尺寸 (*)		重要尺寸	
A1	0.8	A	21.0±0.2
		B	15.0±0.2
		C	15.6±0.2
		D	7.08±0.1

MODEL NO	SCHEMATIC

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

RSW-RPA-0302-LF

SERIES

3P2C

PANEL FRONT

DIP 90°

LEADFREE

DESCRIPTION: