

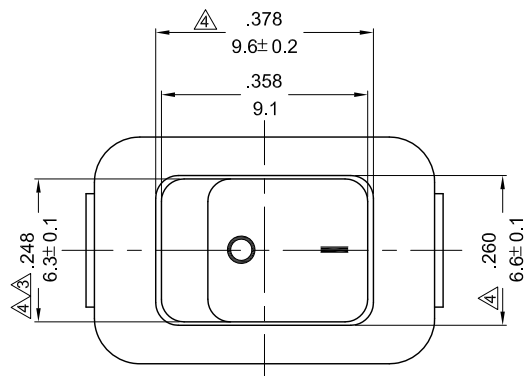


ROCKER SWITCH MODEL
 RATING:3A 250VAC , 6A 125VAC (UL/CUL)
 6A 125VAC (UL,CUL)
 3A 250VAC~ μ T100/55 (VDE/ENEC/CQC)
 DIELECTRIC VOLTAGE-WITHSTAND:1000VAC FOR 1 MINUTE
 INSULATION RESISTANCE:DC 500V 100m Ω (MIN)
 CONTACT RESISTANCE:20m Ω INITIAL (MAX)

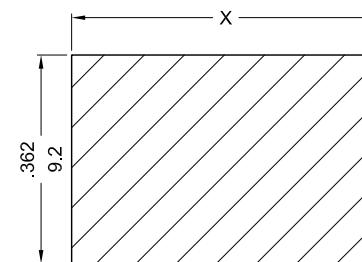

MOUNTING HOLE

X	Cutout Dimension	Panel Thickness
A	.535/13.6 $^{+0}_{-0.1}$	0.75~1.25
B	.539/13.7 $^{+0}_{-0.1}$	1.25~2.0
C	.543/13.8 $^{+0}_{-0.1}$	2.0~2.5

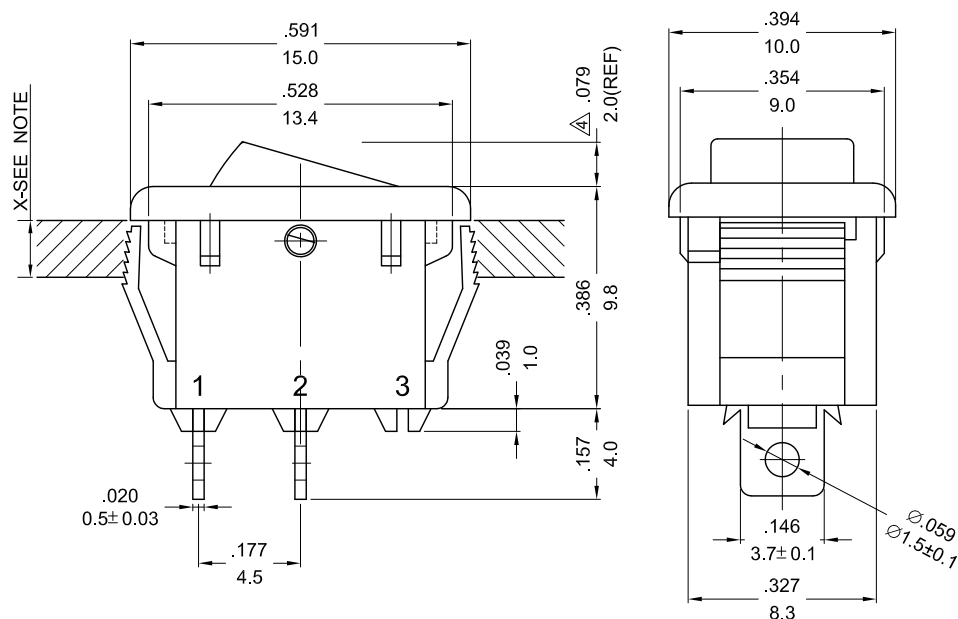

NOTE: 1.TOLERANCES UNLESS OTHERWISE SPECIFIED:± $\frac{0.012}{0.3}$ (in/mm)
 2.X MEANS FOR APPLICATION PANEL THICKNESS MUST BE UNDER 2.5mm

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 X, ±
 .XX ±
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

RSW13-S3PA-0302-LF

SERIES

LEADFREE

3P2C

PANEL FRONT
 SOLDER PIN 3.7mm

DESCRIPTION: