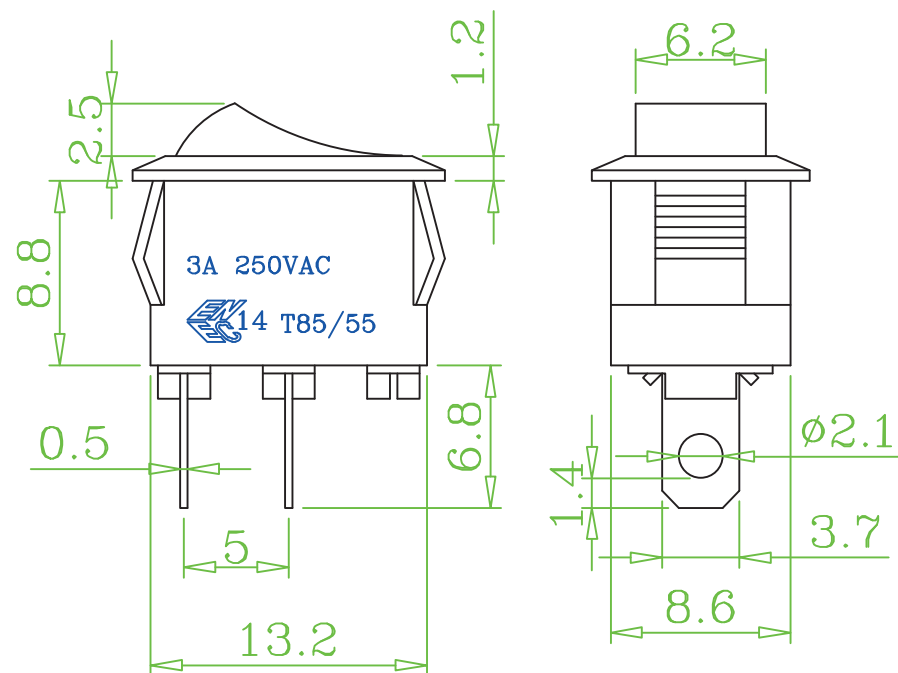
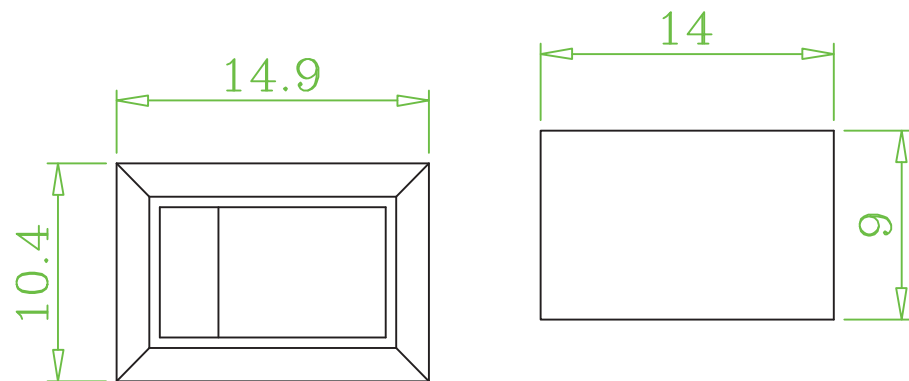


Specifications:

1.Circuit : A: ON-OFF
B: ON-ON

2.Rating : 3A 250VAC

3.Contact Resistance : 1A 5VDC 30m Ω (Max.)

4.Insulation Resistance : 500 VDC 100M Ω

5.Withstand VOL : 500VAC 1 Minute

6.Operating Force : 300?00g

7.Life Cycles : 10,000 Cycles

8.Safety :  14 T85/55



Panel thickness	X
0.75~1.25	13.9
1.25~2.0	14.1
2.0~3.0	14.3

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
X, $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION 

照片框

ORDER INFORMATION

RSW14-S3PA-0302-LF

SERIES

3P2C

LEADFREE

PANEL FRONT
SOLDER PIN 3.7mm

DESCRIPTION: