

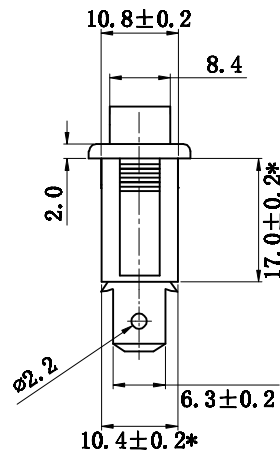
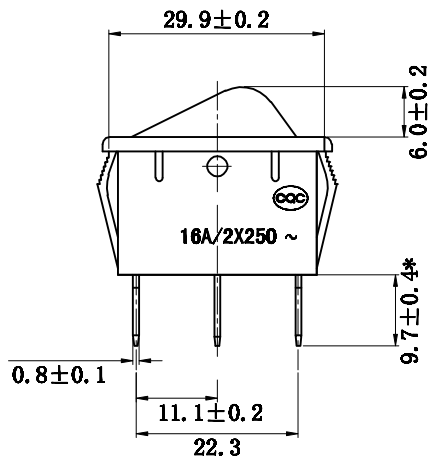



MOUNTING HOLE



SPECIFICATION

CONTACT RATING:16A125VAC 16A250VAC 1/4HP ()

12(3)250V ~25T85/55 ()

16A/2*250VAC ()

INITAL CONTACT RESISTAANCE:50Milliohms Max.

INSSULATION RESISTANCE:1,000 Megohms Min. 500VDC

WITHSTAND VOLTAGE:2,000 VAC-1 Minute.

LIFE EXPECTANCY:OVER 10,000 Cycles

OPERATING FORCE; 1000±200Grem

SWITCHING FUNCTION			SCHEMATIC
MODEL NO	ON	NONE OFF	

FILE NO	Marking
E105856	
LR112904-3	
CQC03002004732	
40027381	

主要尺寸(*)		重要尺寸	
A1	14±0.2	A	29.9±0.2
B1	31.6	B	11.1±0.2
C1	27.3±0.2	C	10.8±0.2
D1	17±0.2	D	8.4±0.2
E1		E	9.7±0.4
F1		F	6.3±0.2
		G	
		H	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.15
.XXX ± 0.10
ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

RSWL-Q6PAKR-03-LF

SERIES

LEADFREE

3 WAY

LAMP COLOR RED

HOUSING COLOR BLACK

PANEL

6.35mm TAB

DESCRIPTION: ROCKER SWITCH