

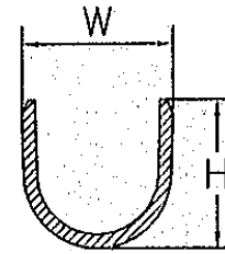


*錫層厚度:1.0~2.5 μm

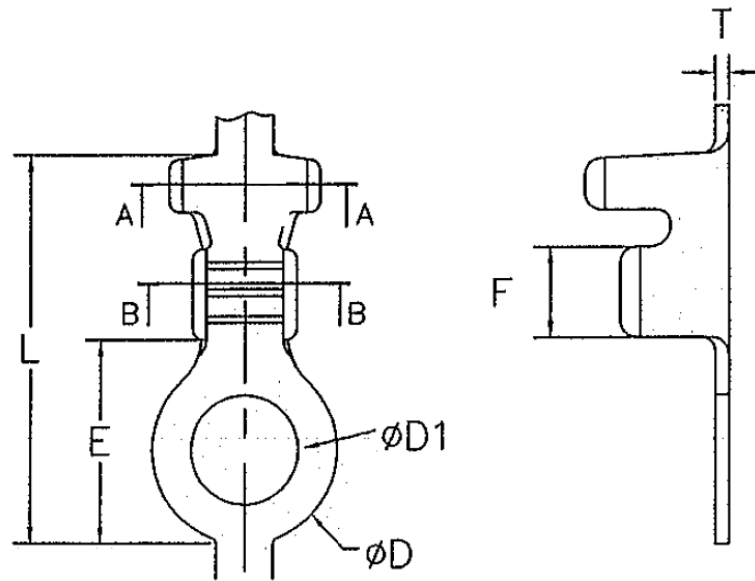

A-A SEC



B-B SEC

ITEM	SPECIFICATION	
T	0.4	± 0.03
L	11.5	± 0.30
E	6.0	± 0.30
D	$\phi 5.5$	± 0.10
D1	$\phi 3.2$	± 0.10
F	2.7	± 0.20
W	4.5	± 0.30
W1	3.1	± 0.25
H	4.3	± 0.25
H1	3.25	± 0.25

T : 0.4

WIRE GAUGE
AWG
16-22

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$

.X, $\pm$

.XX, $\pm$

.XXX, $\pm$

ANG, $\pm$

PPOJECTION

照片框

ORDER INFORMATION

RT-32T55-16-LF
SERIES T T T LEADFREE
16-22 AWG
OUTER DIAMETER 5.50
TIN
INSIDE DIAMETER 3.20

DESCRIPTION: