


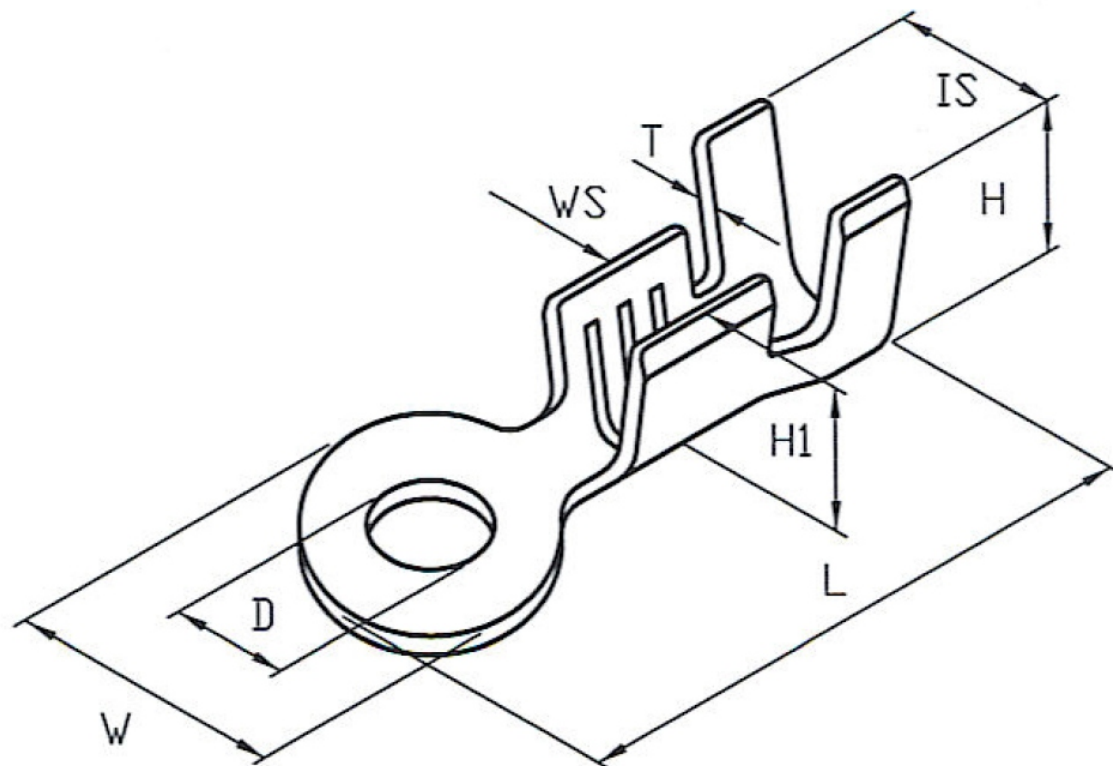

MATERIAL:BRASS
 THICKNESS:0.5
 HARDNESS:H/2
 PLATING:TIN 40u' MIN
 WIRE RANGE:(AWG)16-20
 INSULATION O.D.:3.8MAX.
 VOLTAGE RATING:AC,DC,250V
 CURRENT RATING:AC,DC,10A
 TEMPERATURE RANGE : -25°C TO +85°C

DIMENSION:(MM)

T:0.5±0.03
 L:13.0±0.35
 IS:4.5±0.35
 WS:3.1±0.35
 H:4.6±0.25
 H1:3.4±0.25
 D:3.2±0.15
 W:6.0±0.2

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

RT-32T6-16-LF
 SERIES | | | LEADFREE
 | | | 16-20 AWG
 | | | OUTER DIAMETER 6Ø
 | | | TIN
 | | | INSIDE DIAMETER 3.2Ø

DESCRIPTION: