


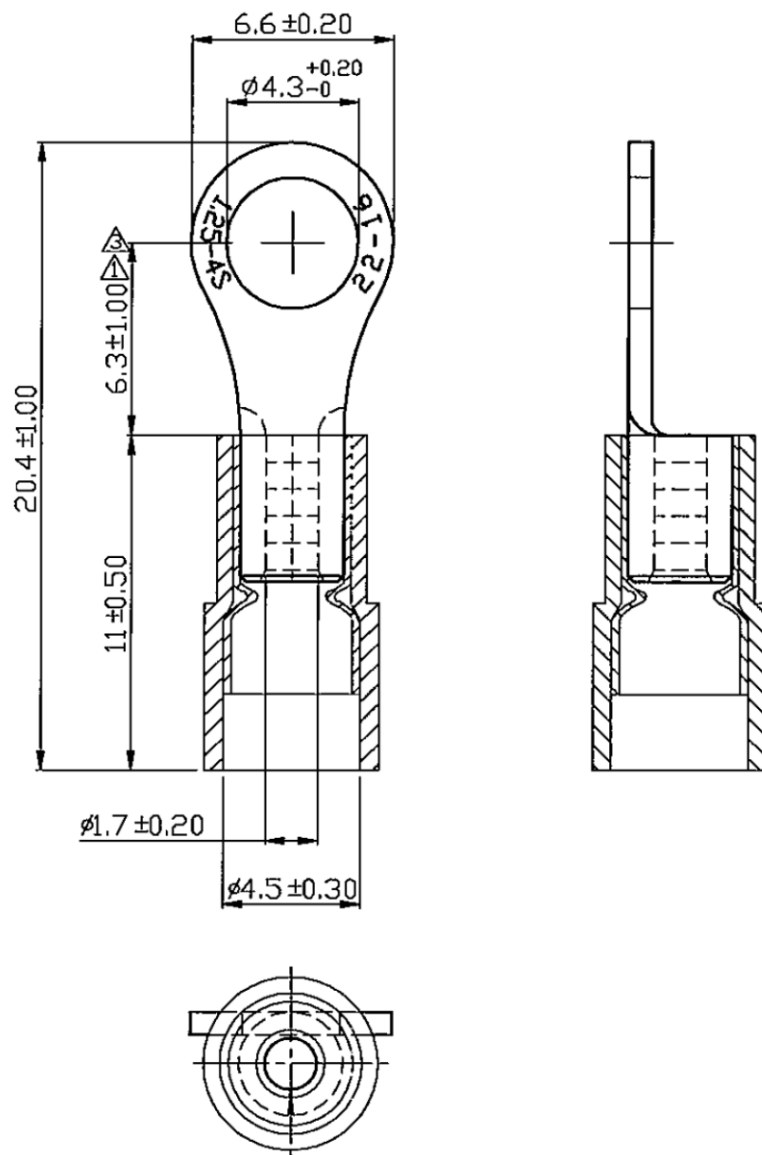

NOTE :

1. MAXIMUM ELECTRIC CURRENT : 

|        |    |    |    |    |
|--------|----|----|----|----|
| A.W.G. | 22 | 20 | 18 | 16 |
| AMP.   | 9  | 12 | 17 | 18 |
2. MAXIMUM ELECTRICAL RATING : 105°C 600 VOLTS MAX.
3. INSULATION MATERIAL : NYLON
4. INSULATION COLOR : RED
5. TERMINAL MATERIAL : COPPER
6. WIRE RANGE : 22-16 A.W.G. ( 0.5-1.5 mm<sup>2</sup> )
7. TERMINAL SURFACE TREATMENT : TIN PLATED
8. DOUBLE CRIMP : WITH COPPER SLEEVE ON BARREL
9. TERMINAL THICKENSS : 0.75 mm

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

X. ±

CHECKED BY GENIUS

.X ±

UNIT / mm

SCALE 1 : 1

.XX ±

DATE

.XXX ±

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

RT-NC43S-16-LF  
SERIES | 4.3 dia | LEADFREE  
16 AWG  
NYLON+C

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: